
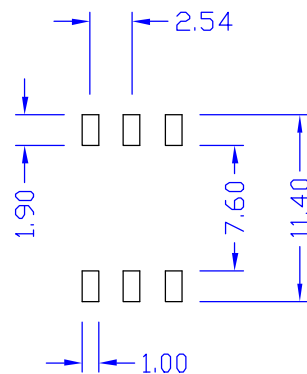

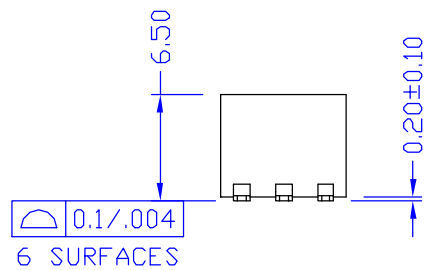
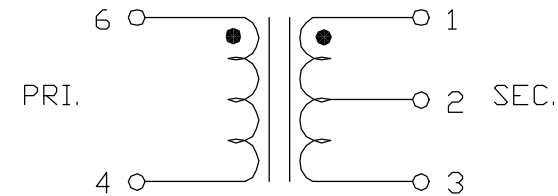



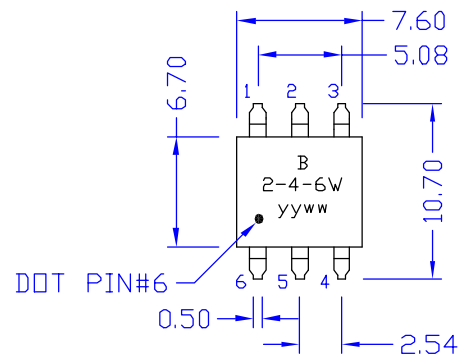

SUGGESTED PAD LAYOUT

ELECTRICAL CHARACTERISTICS :

1. RATIO IMPEDANCE PIN 1-3:6-4 = 4:1
2. INSERTION LOSS : 0.02-0.05 MHZ = 3 dB MAX.
0.05-0.1 MHZ = 2 dB MAX.
0.1-100 MHZ = 1 dB MAX.
100-150 MHZ = 2 dB MAX.
150-250 MHZ = 3 dB MAX.
3. FREQUENCY : 0.02~250 MHZ.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech[®] Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE RF TRANSFORMER	
								DWG. NO. 2-4-6W	
A	Z= SEC:PRI	09/02/2003	BART	AL	SUEDY	UNITS:		SAFETY	
	RELEASE	07/27/2004	BART	AL	SUEDY	M/M		SHEET 10F 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW	
REVISIONS						07/27/04		Pair	