

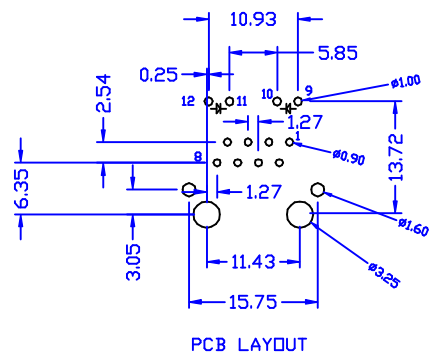
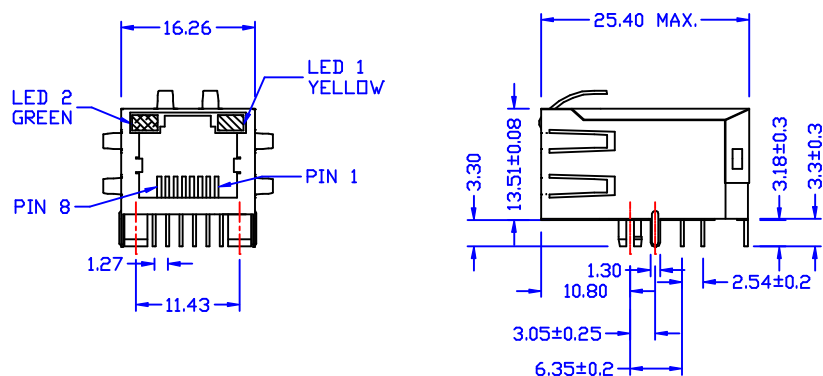




UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

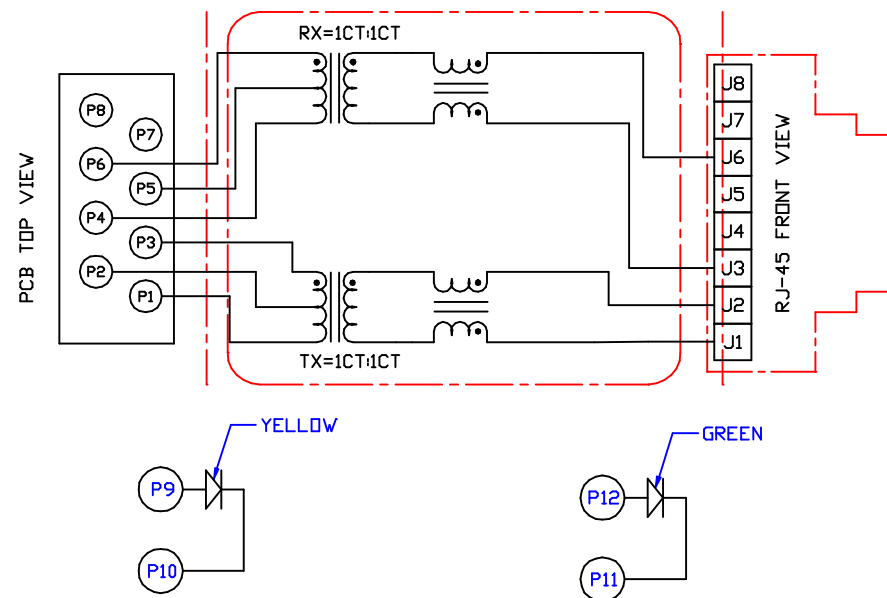

ELECTRICAL CHARACTERISTICS :

1. OCL (@100KHZ/0.1Vrms 8mA DC/BIAS) : 350 μ H MIN.
2. DCR : P1-P3, J1-J2, J3-J6 = 1.0 OHM MAX.
P4-P6 = 1.2 OHM MAX.
3. HI-PDT : 1500 Vrms.
4. INSERTION LOSS : 0.1~100MHZ = -1.0 dB MAX.
5. RETURN LOSS : 1~30MHZ = -20 dB MIN.
30~60MHZ = -15 dB MIN.
60~80MHZ = -10 dB MIN.
6. CROSS TALK : 1~100MHZ = -30 dB MIN.
7. TURNS RATIO : 1CT:1CT $\pm 3\%$.
8. CMRR : 1~100MHZ = -30 dB MIN.

						Atech®		TITLE
						Atech Technology Co., Ltd.		LAN-MATE
						TEL:022794-6667 FAX:022794-8004		DWG. NO.
								10188C414MD14
RELEASE	01/27/2005	BART	AL	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
ND	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS						DATE		Pair
						01/27/05		