

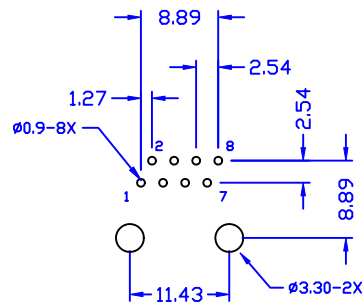
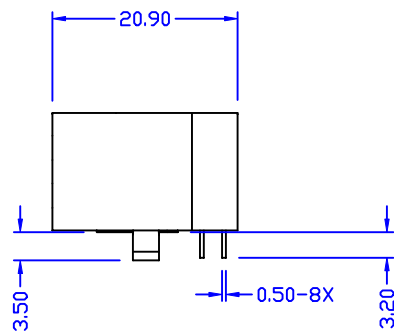





PCB LAYOUT MOUNTING HOLE(TOP VIEW)

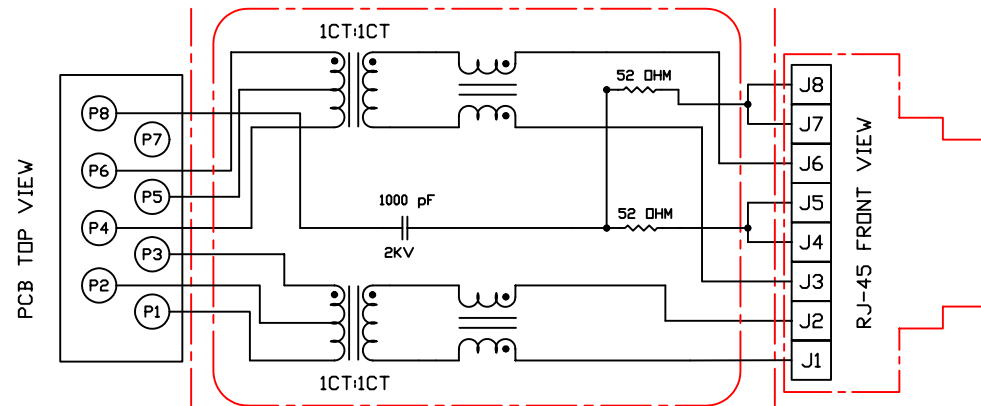

ELECTRICAL CHARACTERISTICS :

1. DCL (@100KHZ/0.1V WITH 8mA DC BIAS) : 350 uH MIN.
2. DCR : P1-P3,J1-J2,J3-J6 = 1.0 OHM MAX.
P4-P6 = 1.2 OHM MAX.
3. HI-POT : 1500 Vrms.
4. INSERTION LOSS : 0.1~100 MHZ = -1.0 dB MAX.
5. RETURN LOSS : 1~30 MHZ = -20 dB MIN.
30~60 MHZ = -15 dB MIN.
60~80 MHZ = -10 dB MIN.
6. CROSS TALK : 1~100 MHZ = -30 dB MIN.
7. TURNS RATIO : 1CT:1CT ±3%.
8. CMRR : 1~100 MHZ = -30 dB MIN.
125 MHZ = -35 dB MIN.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

					Atech®		TITLE
					Atech Technology Co. Ltd.		LAN-MATE
					TEL:022794-6667 FAX:022794-8004		DWG. NO.
							1101880919YC
RELEASE	03/10/2005	BART	AL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS					DATE		Pair
					03/10/05		