

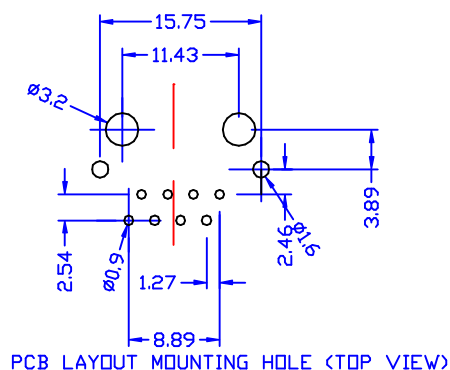
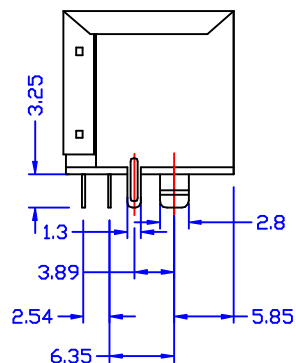





PCB LAYOUT MOUNTING HOLE (TOP VIEW)

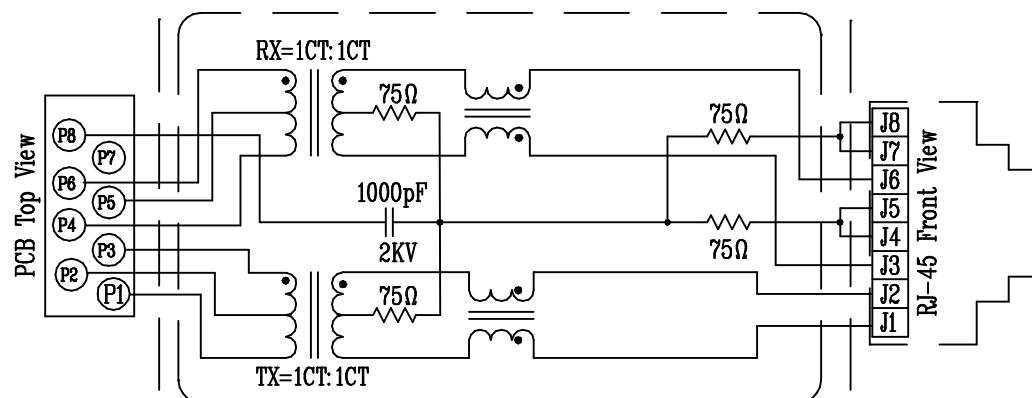

ELECTRICAL CHARACTERISTICS :

1. $\square L$ (@100KHZ/0.1Vrms 8mA DC/BIAS) : 350 μ H MIN.
2. DCR : P1-P3,J1-J2,J3-J6 = 1.0 Ω M MAX.
P4-P6 = 1.2 Ω M MAX.
3. HI-PDT : 1500 Vrms.
4. INSERTION LOSS : 0.1~100MHZ = -1.0 dB MAX.
5. RETURN LOSS : 1~30 MHZ = -20 dB MIN.
30~60 MHZ = -15 dB MIN.
60~80 MHZ = -10 dB MIN.
6. CROSS TALK : 1~100 MHZ = -30 dB MIN.
7. TURNS RATIO : 1CT:1CT $\pm$ 3%.
8. CMRR : 1~100 MHZ = -30 dB MIN.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8804	TITLE LAN—MATE	
							DWG. NO. 1101880MD12	
	RELEASE	01/18/2005	BART	AL	SUDY	UNITS: M/M	SAFETY	SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						01/18/05		