
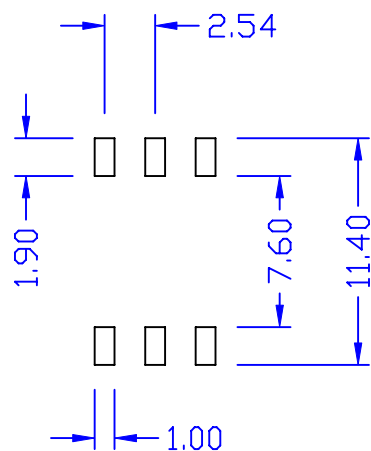
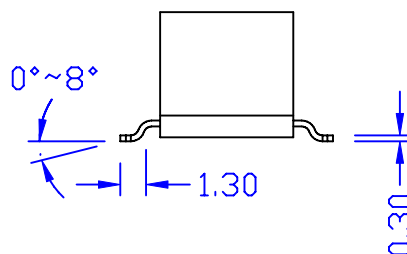
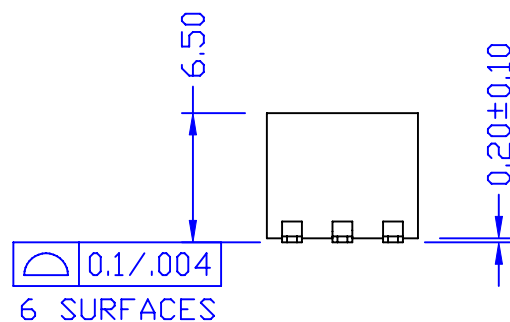
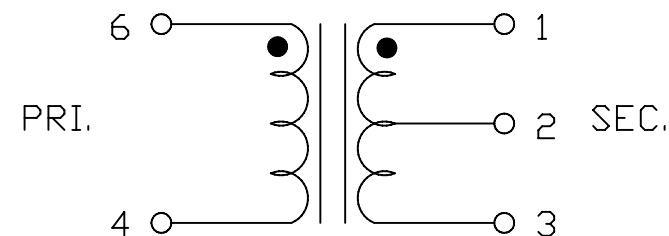



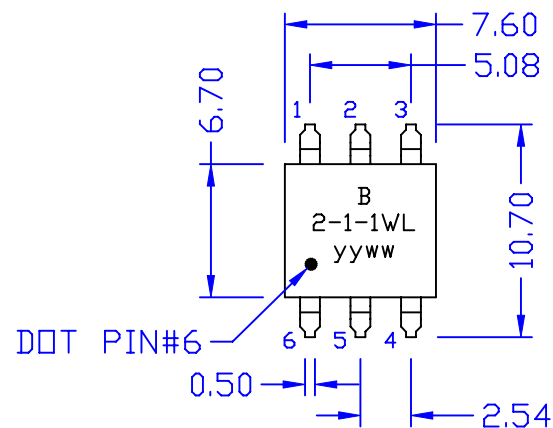

SUGGESTED PAD LAYOUT

ELECTRICAL CHARACTERISTICS :

1. RATIO IMPEDANCE ($\pm 5\%$) : 1-3 : 6-4
2. INSERTION LOSS : 0.005-200 MHZ = 3 dB MAX.
0.08-150 MHZ = 2 dB MAX.
0.2-80 MHZ = 1 dB MAX.
3. FREQUENCY : 0.05~200 MHZ.
4. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Bourns Inductive Solution		TITLE RF TRANSFORMER
								DWG. NO. 2-1-1WL
						UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW Pair
REVISIONS						01/08/08		