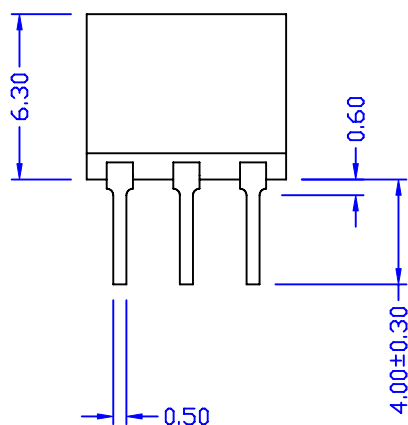
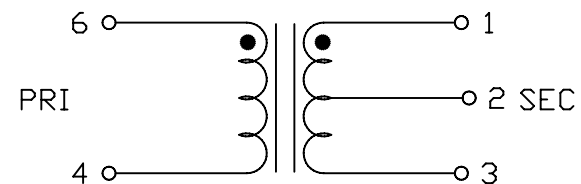
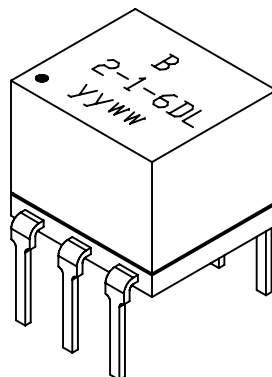
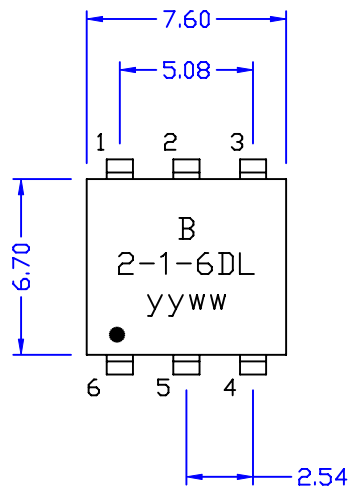


ELECTRICAL CHARACTERISTICS @25°C:

1. RATIO IMPEDANCE PRI : SEC = 1 : 1 ±5%
2. INSERTION LOSS :
 0.02-50 MHZ = 1 dB MAX.
 0.01-150 MHZ = 2 dB MAX.
 0.003-300 MHZ = 3 dB MAX.
3. FREQUENCY : 0.003-300 MHZ.
4. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Bourns Inductive Solution		TITLE RF TRANSFORMER	
								DWG. NO. 2-1-6DL	
	RELEASE	09/17 /2007	pair	Angel	Eugene	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW <i>Pair</i>
REVISIONS						09/17/07			