

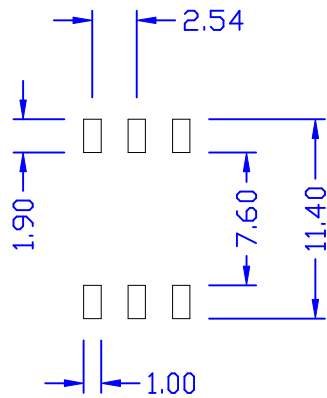
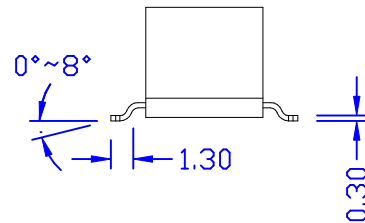
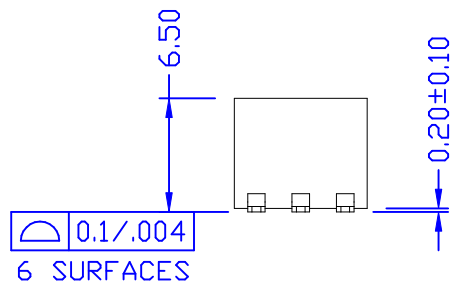



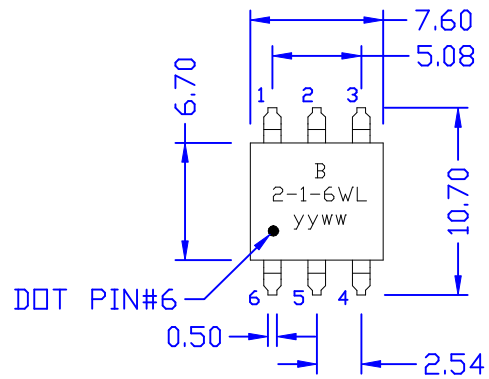

SUGGESTED PAD LAYOUT

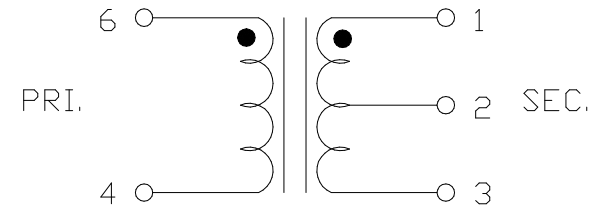

ELECTRICAL CHARACTERISTICS :

1. RATIO IMPEDANCE ($\pm 5\%$) : 1:1
2. INSERTION LOSS : 0.003-0.01 MHZ = 3 dB MAX.
0.01-0.02 MHZ = 2 dB MAX.
0.02-50 MHZ = 1 dB MAX.
50-150 MHZ = 2 dB MAX.
150-300 MHZ = 3 dB MAX.
3. FREQUENCY : 0.003~300 MHZ.
4. LEAD-FREE.
5. REEL PACKING

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech®		TITLE RF TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. 2-1-6WEL	
						TEL:0212794-6667 FAX:0212794-8004			
RELEASE		11/23/2005	BART	AL	SUEDY	UNITS: M/M		SAFETY	
DESCRIPTION		DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						11/23/05		DRAW Pair	