
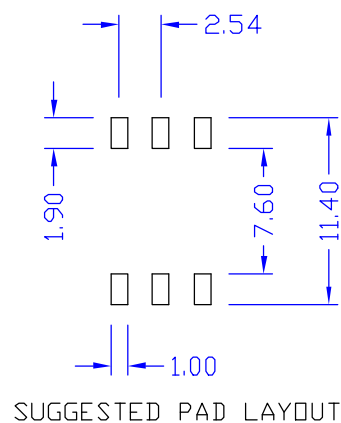

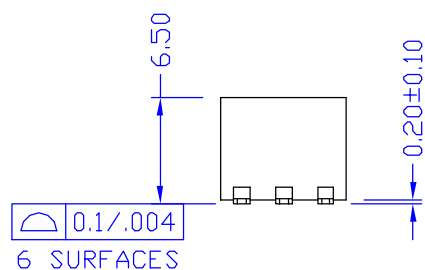
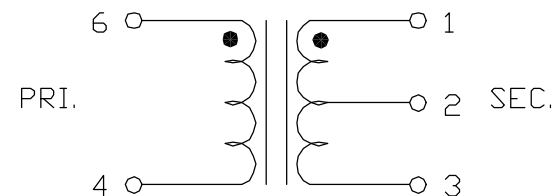



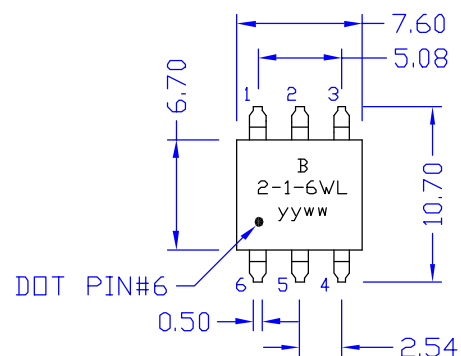

ELECTRICAL CHARACTERISTICS :

1. RATIO IMPEDANCE ($\pm 5\%$) : 1:1
2. INSERTION LOSS : 0.003-0.01 MHZ = 3 dB MAX.
0.01-0.02 MHZ = 2 dB MAX.
0.02-50 MHZ = 1 dB MAX.
50-150 MHZ = 2 dB MAX.
150-300 MHZ = 3 dB MAX.
3. FREQUENCY : 0.003~300 MHZ.
4. LEAD-FREE.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech[®] Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE RF TRANSFORMER	
								DWG. NO. 2-1-6WL	
RELEASE		01/31/2005	BART	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						01/31/05			
								DRAW	Pair