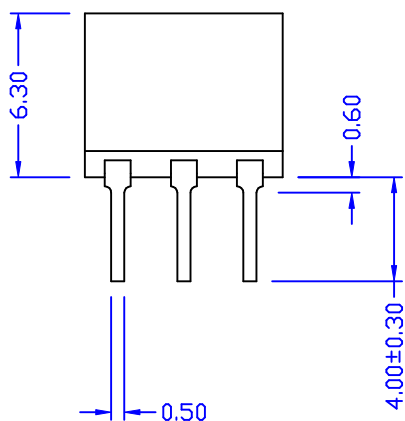
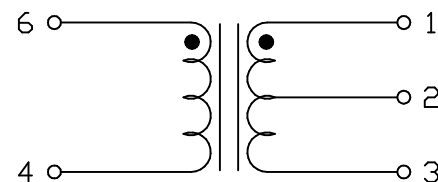
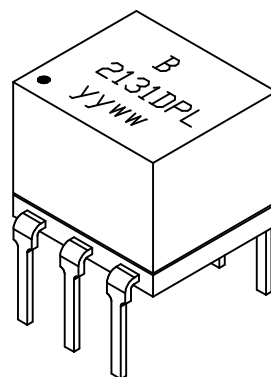
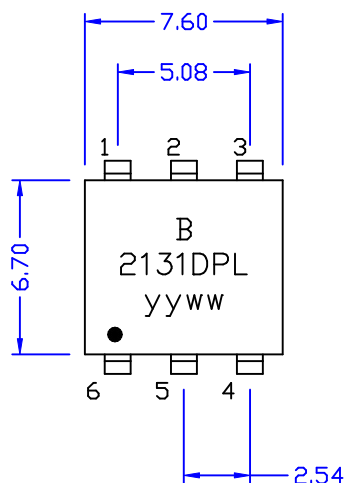


ELECTRICAL CHARACTERISTICS @25°C:

1. RATIO IMPEDANCE ($\pm 5\%$) : 1-3 : 6-4 = 13:1
2. INSERTION LOSS : 0.3-0.7 MHZ = 3 dB MAX.
0.7-5 MHZ = 2 dB MAX.
5-20 MHZ = 1 dB MAX.
20-80 MHZ = 2 dB MAX.
80-120 MHZ = 3 dB MAX.
3. FREQUENCY : 0.3~120 MHZ.
4. RoHS COMPLIANCE

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE RF TRANSFORMER	
								DWG. NO. 2-13-1DPL	
	RELEASE	03/09/2006	PAIR	AL	EUGENE	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW		Pair
REVISIONS						03/09/06			