
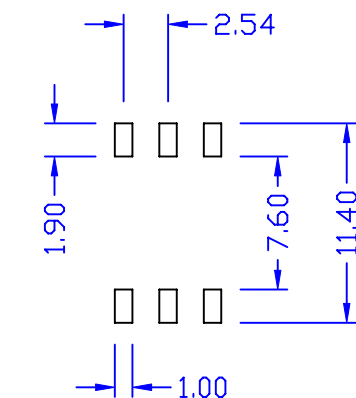
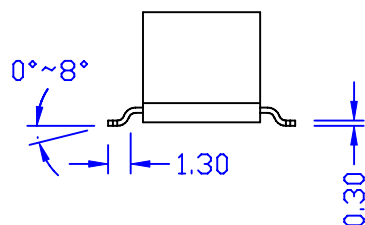
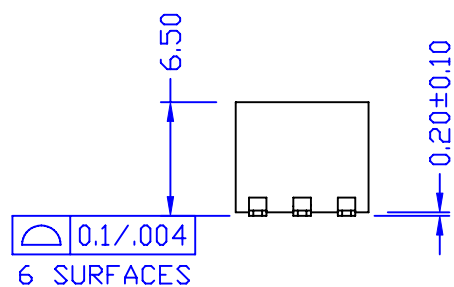
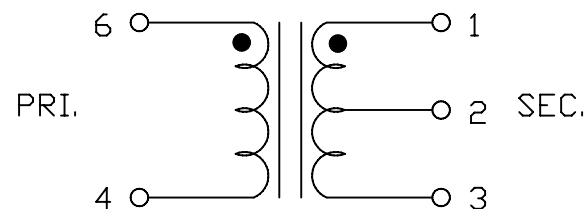



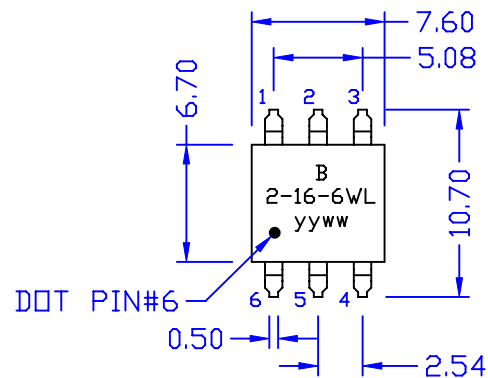

SUGGESTED PAD LAYOUT

ELECTRICAL CHARACTERISTICS :

1. RATIO IMPEDANCE ($\pm 5\%$) : 16:1
2. INSERTION LOSS : 0.03-75 MHZ = 3 dB MAX.
0.06-30 MHZ = 2 dB MAX.
10-20 MHZ = 1 dB MAX.
3. FREQUENCY : 0.03~75 MHZ.
4. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE RF TRANSFORMER	
								DWG. NO. 2-16-6WEL	
	RELEASE	03/14/2007	PAIR	WILLIE	EUGENE	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						03/14/07		DRAW Pair	