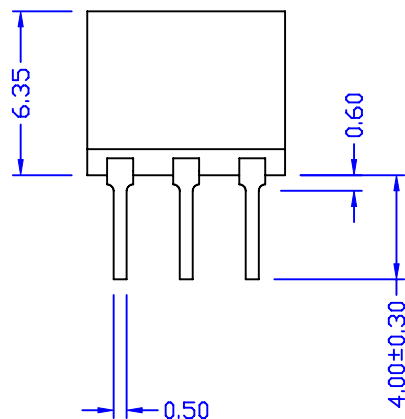
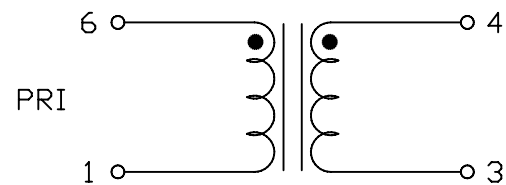
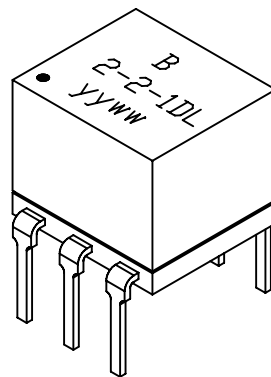
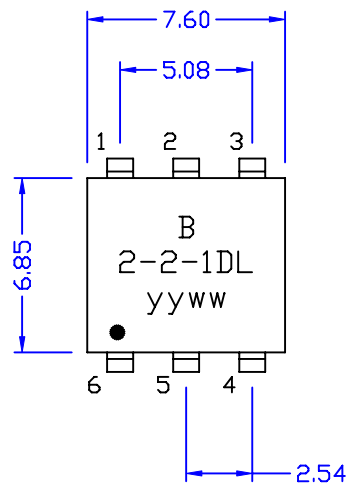


ELECTRICAL CHARACTERISTICS @25°C:

1. RATIO IMPEDANCE PRI : SEC = 2 : 1
2. INSERTION LOSS :
 - 0.5- 50MHZ = 1 dB
 - 0.1- 100 MHZ = 2 dB
 - 0.07- 200MHZ = 3 dB
3. FREQUENCY : 0.07-200 MHZ.
4. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:0272794-6667 FAX:02794-8004		TITLE RF TRANSFORMER	
								DWG. NO. 2-2-1DL	
	RELEASE	07/10/2007	PAIR	WILLIE	EUGENE	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						07/10/07		DRAW Pair	