

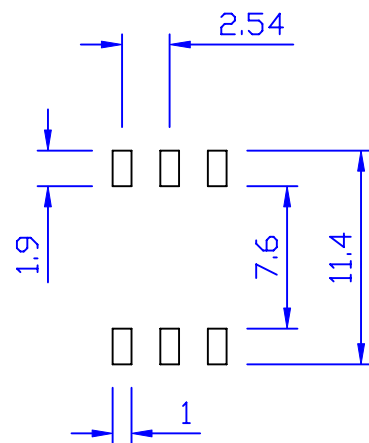
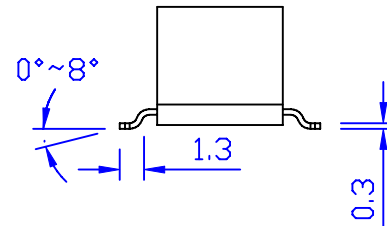
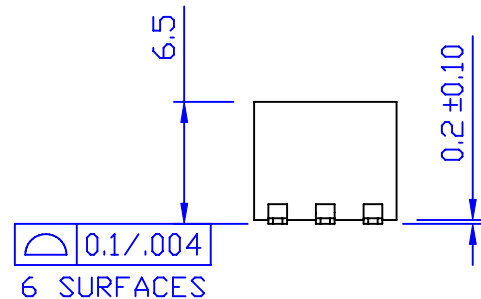



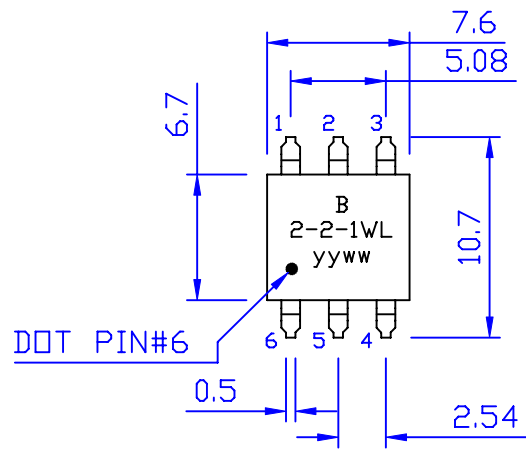

SUGGESTED PAD LAYOUT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

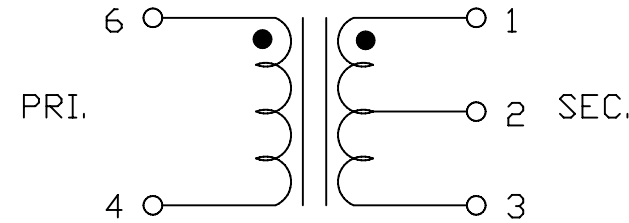

ELECTRICAL CHARACTERISTICS :

1. RATIO IMPEDANCE ($\pm 3\%$) : 1-3 : 6-4 = 2:1
2. INSERTION LOSS : 0.007-200 MHZ = 3 dB MAX.
0.1-100 MHZ = 2 dB MAX.
0.5-50 MHZ = 1 dB MAX.
3. FREQUENCY : 0.07-200 MHZ.
4. RoHS COMPLIANT

						Bourns Inductive Solution		TITLE RF TRANSFORMER
								DWG. NO. 2-2-1WL
RELEASE		03/27/2008	Pair	Willie	Eugene	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW Pair
REVISIONS						03/27/08		