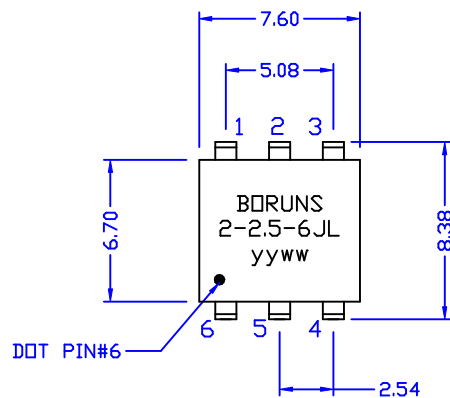


SUGGESTED PAD LAYOUT

ELECTRICAL CHARACTERISTICS :

1. T/R : 1.556CT:1 $\pm 2\%$.
2. INSERTION LOSS :
 0.01~0.02MHZ = 3 dB MAX.
 0.02~0.05MHZ = 2 dB MAX.
 0.05~20MHZ = 1 dB MAX.
 20~50MHZ = 2 dB MAX.
 50~100MHZ = 3 dB MAX.
3. FREQUENCY : 0.01~100MHZ.
4. L_s (@10KHZ/0.1Vrms) :
 PIN 6-4 = 720 μ H MIN.
5. L_e (@100KHZ/0.1Vrms) :
 PIN 6-4 (SHORT 1-3) = 0.3 μ H MAX.
6. C_{ww} (@100KHZ/0.1Vrms) :
 PIN 6-2 = 15 pF MAX.
7. HI-PDT : 1000

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE RF TRANSFORMER	
								DWG. NO. 2-2.5-6JL	
	RELEASE	10/06/2004	BART	AL	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 10/06/04		SHEET 1 OF 1	
REVISIONS								DRAW <i>Pair</i>	