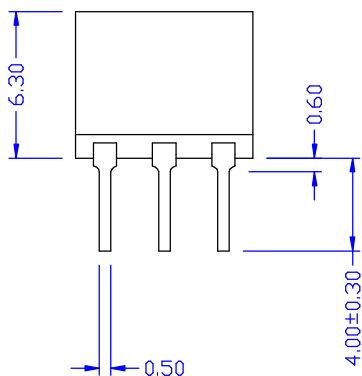
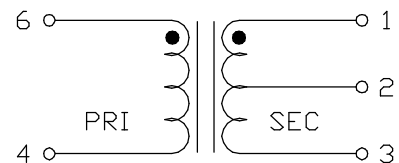

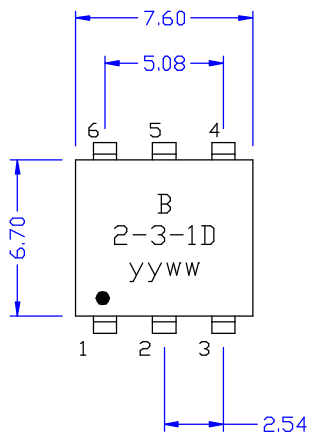


ELECTRICAL CHARACTERISTICS @25°C:

1. RATIO IMPEDANCE ($\pm 5\%$) : 3:1
2. INSERTION LOSS :
 - 0.05-0.1 MHZ = 3 dB MAX.
 - 0.1-0.5 MHZ = 2 dB MAX.
 - 0.5-70 MHZ = 1 dB MAX.
 - 70-200 MHZ = 2 dB MAX.
 - 200-250 MHZ = 3 dB MAX.
3. FREQUENCY : 0.05-250 MHZ.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE RF TRANSFORMER		
								DWG. NO. 2-3-1D		
	RELEASE	04/12/2004	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1		
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW	Pair	
REVISIONS						04/12/04				