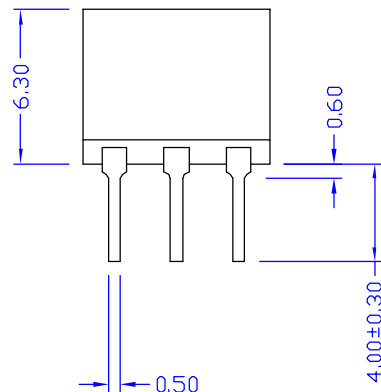
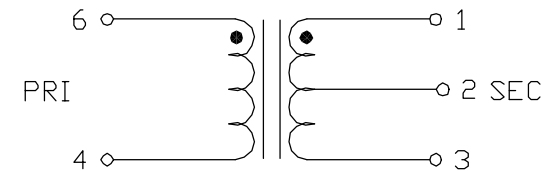
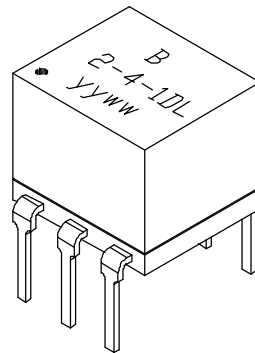
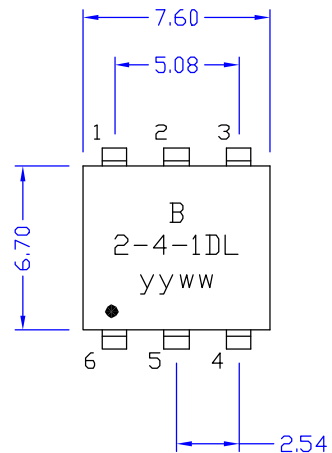


ELECTRICAL CHARACTERISTICS @25°C:

- RATIO IMPEDANCE PIN 1-3:6-4 = 4:1
- INSERTION LOSS :
 - 0.2-0.35 MHZ = 3 dB MAX.
 - 0.35-2 MHZ = 2 dB MAX.
 - 2-100 MHZ = 1 dB MAX.
 - 100-300 MHZ = 2 dB MAX.
 - 300-350 MHZ = 3 dB MAX.
- FREQUENCY : 0.2-350 MHZ.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE RF TRANSFORMER	
								DWG. NO. 2-4-1DL	
A	Z= SEC:PRI	09/02/2005	BART	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
	RELEASE	06/15/2005	BART	AL	SUEDY	DATE 06/15/05			DRAW Pair
NO.	DESCRIPTION	DATE	BY	CHK	APPD				
REVISIONS									