


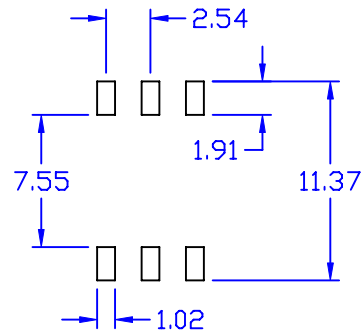
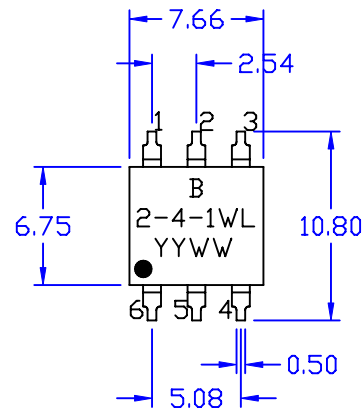


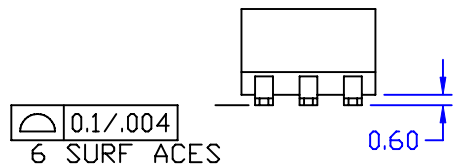

PCB SUGGEST PAD LAYOUT

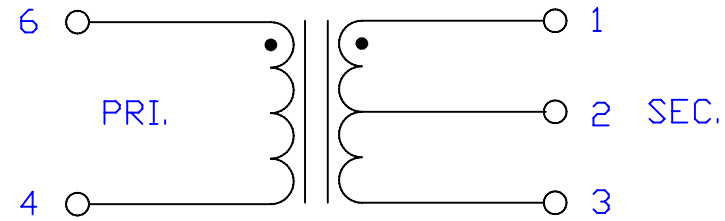

TOLERANCES ± 0.25

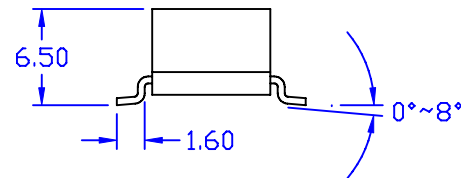

ELECTRICAL CHARACTERISTICS @25°C:

1. RATIO IMPEDANCE PIN 6-4 : 1-3 = 1:4 $\pm 5\%$
2. INSERTION LOSS :
 - 0.2-0.35 MHZ = 3 dB MAX.
 - 0.35-300 MHZ = 2 dB MAX.
 - 2-100 MHZ = 1 dB MAX.
3. FREQUENCY : 0.2-350 MHZ.
4. RoHS COMPLIANT

						Bourns Inductive Solution		TITLE TRANSFORMER
								DWG. NO. 2-4-1WL
	RELEASE	07/26/2006	PAIR	ANGEL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW <i>Pair</i>
REVISIONS						07/26/06		