

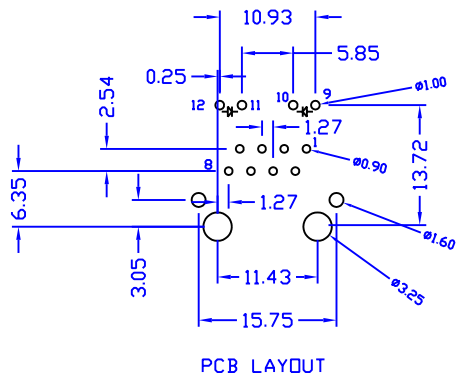
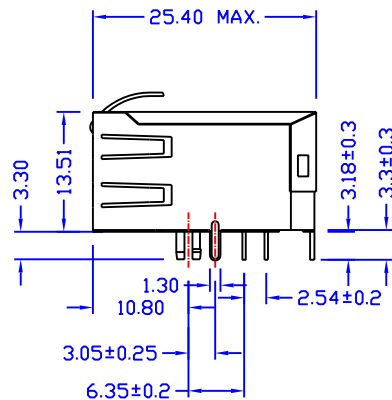
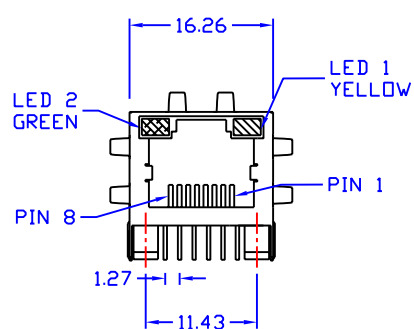




UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

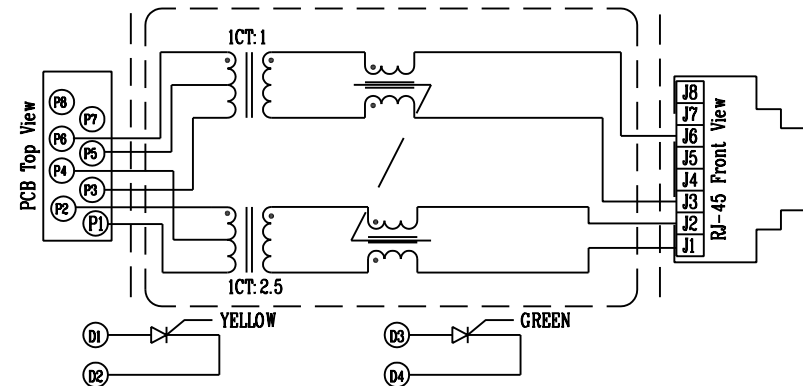

ELECTRICAL CHARACTERISTICS :

1. $\square$ CL (@100KHZ/0.05Vrms) : 200 μ H MIN.
2. DCR : P1-P2 = 0.35 OHM MAX.
P3-P6 = 0.35 OHM MAX.
3. HI-POT : PRI TO SEC = 1500 Vrms.
TX TO RX = 500 Vrms.
4. CMR CHOKE $\square$ CL (@100KHZ/0.05Vrms) : 18 μ H TYP.
5. LL (@100KHZ/0.05Vrms) : 0.4 μ H MAX.
6. TURNS RATIO : TX = 1CT:2.5
RX = 1CT:1
7. CW/W (@100KHZ/0.05Vrms) : 25 pF MAX.

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE	
								LAN—MATE	
								DWG. NO.	
								30188C411MA31	
	RELEASE	03/16/2005	BART	AL	SUEDY	UNITS:		SAFETY	
						M/M			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						03/16/05		DRAW	
								Pair	