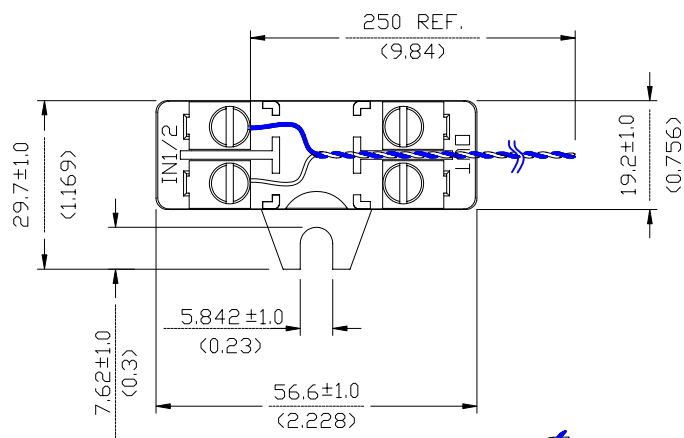


ELECTRICAL CHARACTERISTICS:

1. DCR : 25 OHM MAX. T1-T2(T3,T4 SHORT).
2. INSERTION LOSS :
200 HZ = 1dB MAX.
3.4 KHZ = 1 dB MAX.
3. RETURN LOSS :
1965 HZ = 6 dB MIN.
500 HZ = 5 dB MIN.
3400 HZ = 3 dB MIN.
4. LONGITUDINAL BAL.
LINE PORT TO POTS :
200 HZ = 53 dB MIN.
1 KHZ = 53 dB MIN.
3 KHZ = 58 dB MIN.
POTS TO LINE PORT :
200 HZ = 53 dB MIN.
1 KHZ = 53 dB MIN.
3 KHZ = 58 dB MIN.
5. BAND ATTENUATION :
30 KHZ = 65 dB MIN.
300 KHZ = 65 dB MIN.
1104 KHZ = 55 dB MIN.
2200 KHZ = 55 dB MIN.
6. TIP TO RING CAP. (@100KHZ, 100mVrms) :
POTS PORT = 100 nF MAX.

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE ADSL2+POTS Splitter	
								DWG. NO. 3610A2	
	RELEASE	03/21/2005	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						03/21/05			