

承認書

APPROVAL SHEET

CUSTOMER : Acuwa CUSTOMER NO : 6026890

PRODUCT : ISOLATION TRANSFORMER

PART NO : 6026890 Comply RoHS: ☒

DATE : 2016.12.29 SPEC NO : OA-16122901

TESTED BY : _____ CHECKED BY : _____

SALES BY : _____ APPROVED BY : _____

公司承認章	客戶承認章

A. ELECTRICAL SPECIFICATIONS @25 °C

OCL(@10KHz, 100mV) : PIN 1-4(2,3 SHORT) = 960uH ±40%

L.L. (@100KHz, 0.1Vrms) : PIN 1 - 4 (2-3, 5-6-7-8 SHORT) = 0.4uH MAX.

TURNS RATIO : PIN1-2 : 3-4 : 6-5 : 8-7 = 1 : 1 : 1 : 1 +/-3%

D.C.R : PIN 1-4(2,3 SHORT) = 0.8 OHM MAX.

HI-POT (2500Vrms) : PRI - SEC

RoHS COMPLIANT


OPERATION TEMP. : -40 TO +125 Deg. C.

WORKING VOLTAGE STEADY STATE : 200VAC

ET CONSTANT : 11 V-us MIN.

*Product Type: **Green Product***


B. SCHEMATIC:

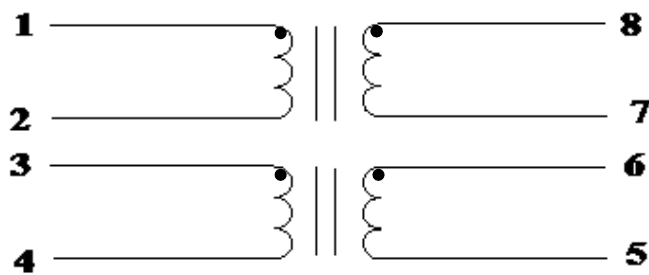

DRAWN BY	CHECKED BY	APPROVED BY	CUSTOMER: Acuwa	DATE	
			PART NO: 6026890	PAGE	

OBEST INT,L LTD

C. DIMENSIONS & MARKING:

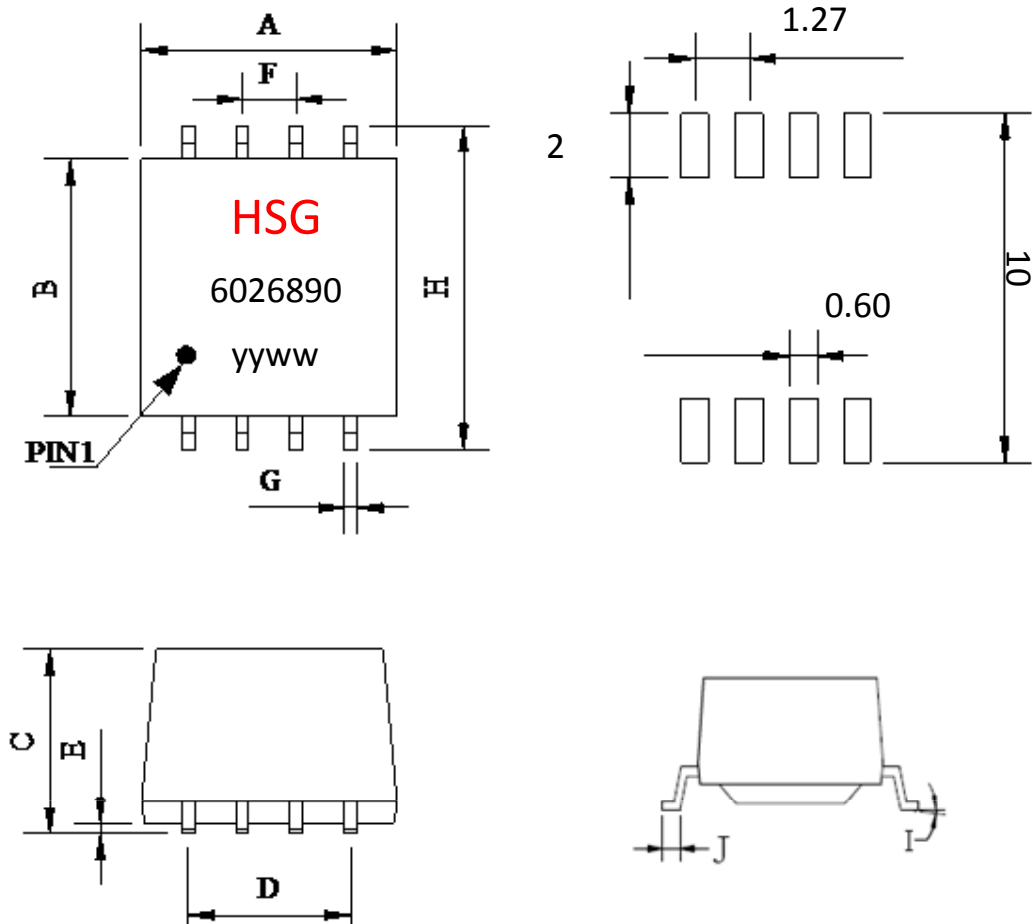


DIM	MILLIMETERS		INCHES	
	Center	Tolerances	Center	Tolerances
A	7.20	± 0.254	0.283	± 0.010
B	6.80	± 0.254	0.268	± 0.010
C	6.00 (MAX)		0.236 (MAX)	
D	3.82	± 0.127	0.150	± 0.005
E	0.30	± 0.127	0.012	± 0.005
F	1.27	± 0.127	0.050	± 0.005
G	0.46	± 0.127	0.018	± 0.005
H	9.50	± 0.254	0.374	± 0.010
I	0-8°	0-8°	0-8°	0-8°
J	0.80	± 0.254	0.031	± 0.010

DRAWN BY	CHECKED BY	APPROVED BY	CUSTOMER: Acuwa	DATE	
			PART NO: 6026890	PAGE	


OBEST INT,L LTD

D. PACKAGE CRITERION:


REEL MECHANICAL DIMENSION

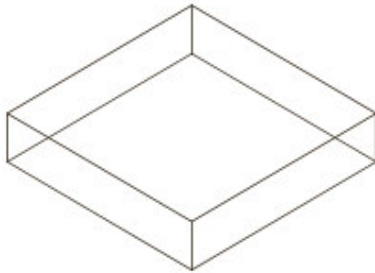

INNER CARTON: 34(L) x 34(W) x 7.6(H)

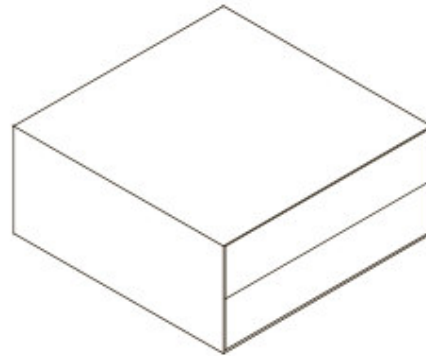

EXPORT CARTON: 36(L) x 36(W) x 15.6(H)

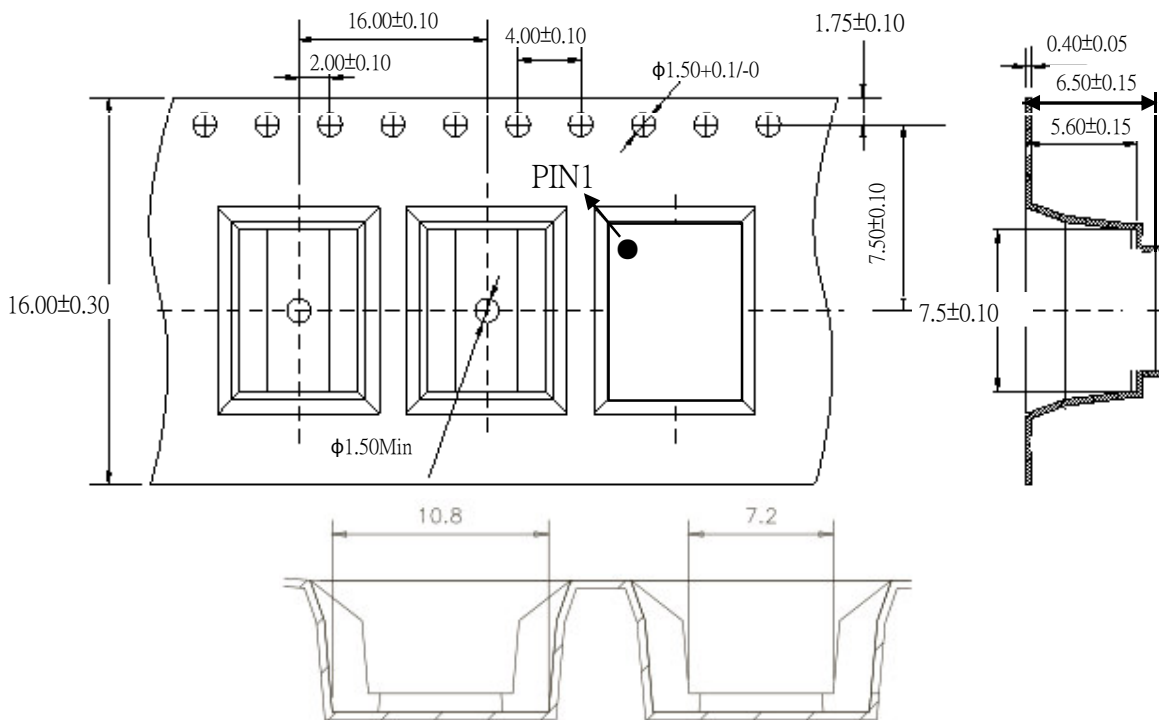

Package Quantity:

units: mm

ONE ROLL: 700 PCS

THREE ROLL BOX: 2100 PCS

TWO BOX CARTON: 4200 PCS

MSL LEVEL: 1

DRAWN BY	CHECKED BY	APPROVED BY	CUSTOMER: Acuwa	DATE	
			PART NO: 6026890	PAGE	

OBEST INT,L LTD