


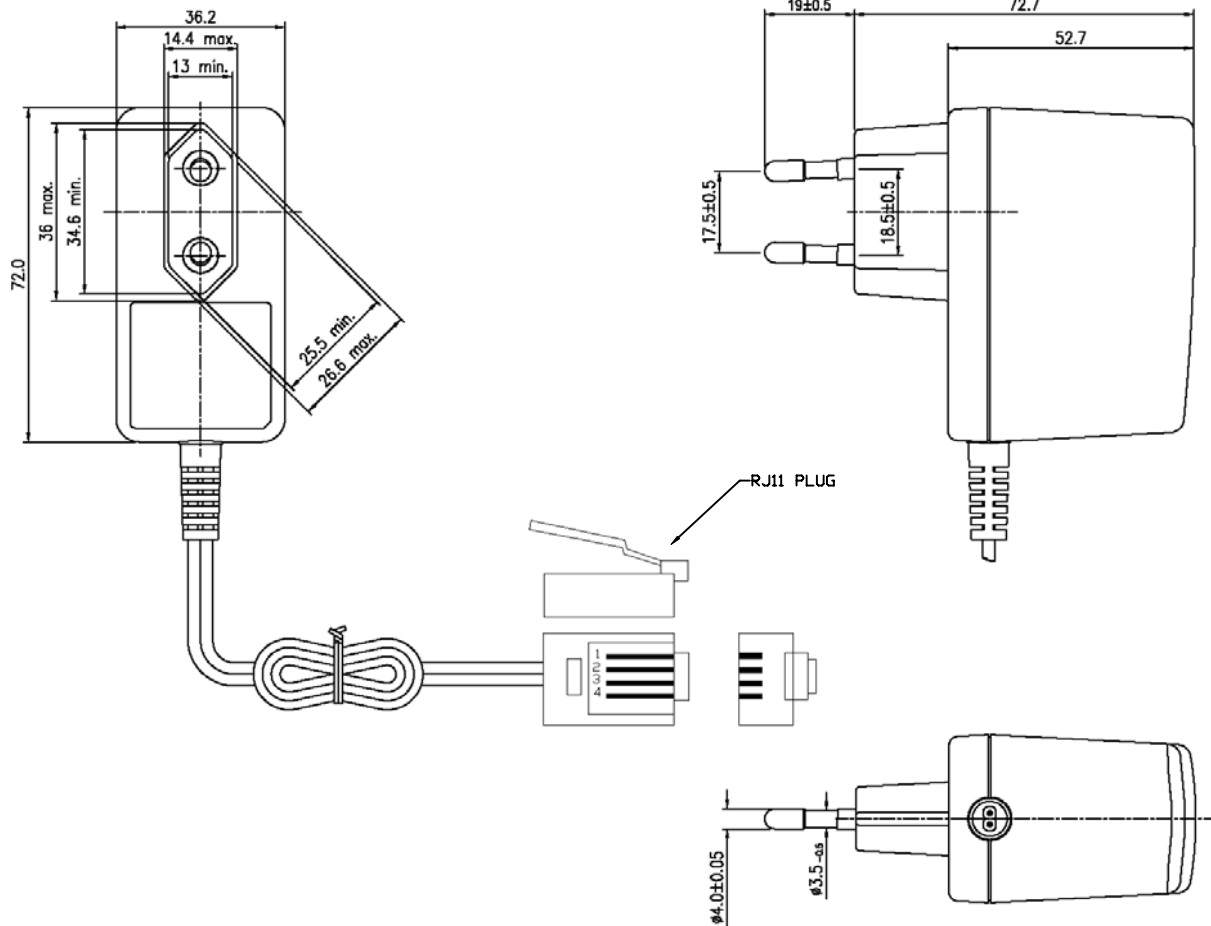

1 Summary



There are 2 different PSU's for the innovaphone devices:

- 6W PSU for IP-Phones (IP110/IP200/IP230)
- 12W PSU for small Gateways (IP22/IP24/IP302/IP305)

2 Phone PSU

- Input voltage 100-240V AC , 47.63HZ
- Output voltage 40V DC, +-5%
- Output current 0.167A 6W
- Output current at least 0.3A 12W
- Ripple 1% peak to peak
- Operating temp. 0°C to 40°C at maximum load
- Storage temp. -40°C to 70°C
- Humidity 5% to 95% non condensing
- Safety according to IEC61000
- ROHS and WEEH compliant
- Secondary cable length: 1.8m
- Secondary connector: Modular 4P4

- ➔ Pin1 : GND
- ➔ Pin2: not connected
- ➔ Pin3: +40V
- ➔ Pin4: GND



- Custom label

3 Gateway PSU

Like phone PSU, but

						Atech®		TITLE
						Atech Technology Co., Ltd.		ADAPTOR
						TEL:02/2794-6667 FAX:02/2794-8004		DWG. NO.
						UNITS:		6W-PSU
						M/M		SHEET 10F 1
						DATE		DRAW
						09/07/07		Pair
REVISIONS								
NO.	DESCRIPTION	DATE	BY	CHK	APPD			
	RELEASE	09/07/2007	Pair	ANGEL	Eugene			