
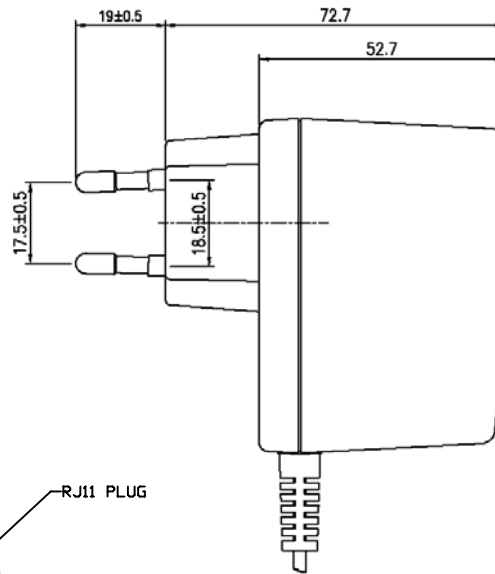
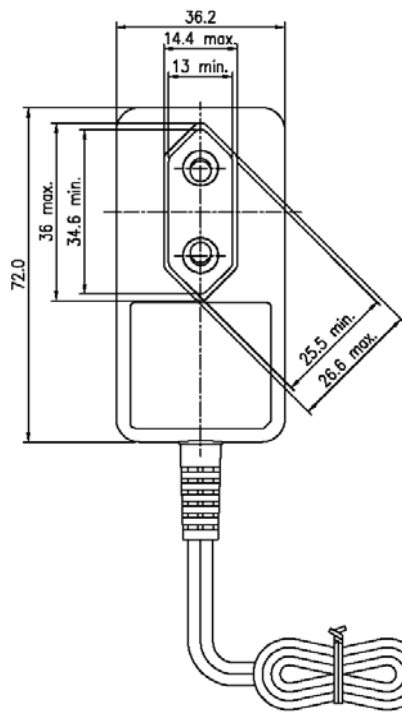



1 Summary

- 6W PSU for IP-Phones
- 12W PSU for small Gateways

2 Phone PSU

- Input voltage 100-240V AC , 47.63HZ
- Output voltage 40V DC, +-5%
- Output current 0.167A 6W
- Output current at least 0.3A 12W
- Ripple 1% peak to peak
- Operating temp. 0°C to 40°C at maximum load
- Storage temp. -40°C to 70°C
- Humidity 5% to 95% non condensing
- Secondary cable length: 1.8m
- Secondary connector: Modular 4P4
 - ➔ Pin1 : GND
 - ➔ Pin2: not connected
 - ➔ Pin3: +40V
 - ➔ Pin4: GND



						Atech®		TITLE
						Atech Technology Co., Ltd.		ADAPTOR
						TEL:02/2794-6667 FAX:02/2794-8004		DWG. NO.
						UNITS:		6W-PSU/12W-PSU
						M/M		SHEET 1 OF 1
						DATE		DRAW
						09/07/07		Pair
REVISIONS								
ND	DESCRIPTION	DATE	BY	CHK	APPD			
	RELEASE	09/07/2007	Pair	ANGEL	Eugene			