

SPECIFICATION FOR APPROVAL

Customer

Cust.'s P/N

SECL's P/N

Version 1.0

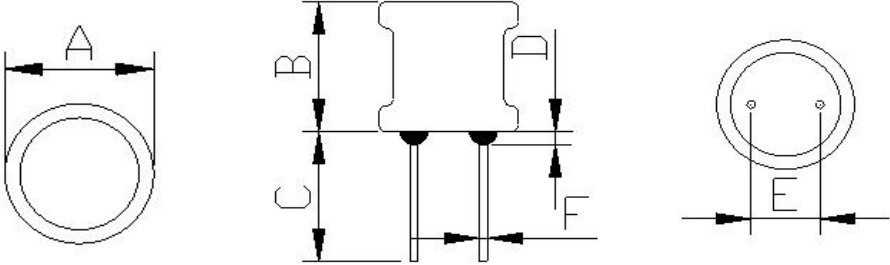
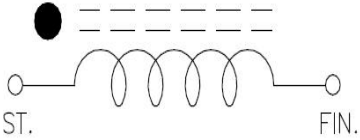
Issued No. A24110601

Date 2024.11.6


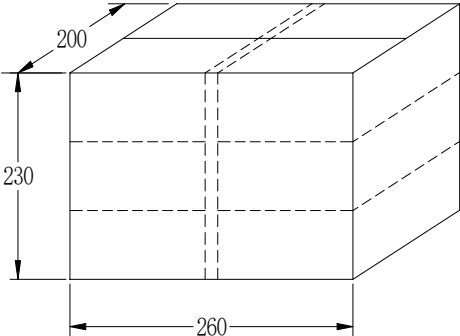
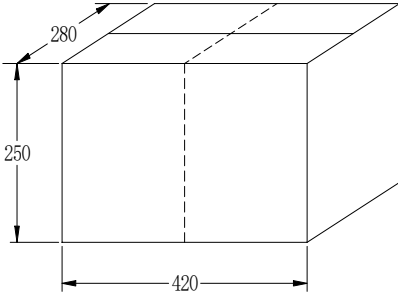
出 图 ✓		
制做	检查	批准
王萍	张大鹏	

承认



		Specification		Sheet No.		A24110601					
				Date		2024.11.6					
				Version		1.0					
Customer		0		Customer's P/N:		Approved Type					
SECL P/N		AFDR2U8CD182K				*		New Productor			
Description		Choke 1.8mH, ±10%,Pb-Free						Change Spec.			
CONFIGURATION						DIMENSIONS (mm)					
						A		9.5		Max.	
						B		14.0		Max.	
						C		10.0		Min	
						D		2.00		Max.	
						E		5.0		± 0.5	
						F		0.60		± 0.1	
						G					
						H					
						I					
						J					
Version		Change Record				Date					
1.0		New productor				2024.11.6					
Electric Characteristics			Test Equipment			Test Condition					
L (mH)		1.8 mH ± 10%		1062A		Test Frequency : 1.0KHz / 0.25V					
DC Resistance		6.0 Ω MAX		TH2512B		TEMP: 25℃ degree					
Rated Current		L0.3A MAX≧0A*80%		1062A+1310		HUMDITY: 65%					
Meterial						Standard Packing					
											
Remark :											
保存壞境:溫度25℃ :濕度75% 保存時間:三個月						Approved		Checked		Writer	
						王萍		张大鹏			

		Test Data				Sheet No.		A24110601			
						Date		2024.11.6			
						Version		1.0			
Customer	0			Customer's P/N:		Approved Type					
						*	New Productor				
SECL P/N	AFDR2U8CD182K					Change Spec.					
Description	Choke 1.8mH, ±10%,Pb-Free										
Electronic Characteristics				Dimension (Unit:mm)							
MEASURE ITEM	L mH	Rdc Ω	IDC A	A mm	B mm	C mm	D mm	E mm	F mm		
Specific Value	1.8	6.0	L0.3A	9.5	14.0	10.0	2.00	5.0	0.60		
Suggest	±10%	Max	MAX≧ 0A*80%	Max.	Max.	Min	Max.	± 0.5	± 0.1		
1	1.8	3.7	OK	8.86	13.14	15.20	1.02	5.01	0.60		
2	1.8	3.7	OK	8.67	13.26	15.30	0.98	5.02	0.60		
3	1.8	3.6	OK	9.11	12.90	14.90	1.05	5.00	0.60		
4	1.8	3.7	OK	9.05	12.77	15.55	1.03	4.90	0.59		
5	1.9	3.8	OK	8.96	13.31	15.49	1.00	5.01	0.59		
6	1.8	3.7	OK	9.06	13.11	15.14	1.02	5.05	0.59		
7	1.8	3.6	OK	9.06	13.30	14.82	0.99	5.07	0.58		
8	1.8	3.6	OK	9.00	13.30	15.10	1.02	4.87	0.59		
9	1.8	3.6	OK	9.06	13.08	15.57	1.01	5.07	0.60		
10	1.8	3.6	OK	8.81	13.16	15.30	1.05	5.05	0.61		
X	1.8	3.6	OK	8.96	13.13	15.24	1.02	5.01	0.60		
R	0.1	0.2	OK	0.44	0.53	0.75	0.07	0.20	0.03		
* Test Equipmε1062A+1310/ TH2512B * Test ConditioTest Frequency: 1.0KHz/0.25V TEMP: 25℃ degree HUMDITY: 65%						Approved		Checked		Writer	
						王萍		张大鹏			

		Packing		Sheet No. A24110601					
				Date 2024.11.6					
				Version 1.0					
Customer	0	Customer's P/N:		Approved Type					
SECL P/N	AFDR2U8CD182K			*	New Productor				
Description	Choke 1.8mH, ±10%,Pb-Free				Change Spec.				
 PE袋 PE袋160mm*150mm —PE袋装200pcs  内箱规格为260mm*200mm*230mm —内箱装25袋  外箱规格为480mm*280mm*250mm —外箱装2小箱									
Remark :				Approved		Checked		Writer	
				王萍		张大鹏			