



YONGCHENG

SPECIFICATION FOR APPROVAL

DATE: APR 12, 2009

SAMPLE Q'TY 5 PCS

CUSTOMER : ACUWA

CUSTOMER P/N: AM-001

YONGCHENG P/N : YL-1T006H-36A

DESCRIPTION : 1 PORT RJ-45 JACK With 10/100 Base-T Magnetics Module

APPROVED SIGNATURES	
YONGCHENG APPROVED SIGNATURES	CUSTOMER APPROVED SIGNATURES
APPROVED BY: LiaoZongCheng	APPROVED BY:
DATE: 2009/04/12	DATE:
APPROVED No. :	APPROVED No. :

(ZUNYI)YONGCHENG ENTERPRISE INC.

LanGongShan,ZunYi City,GuiZhou,China

Tel: 0852-3162322 13087896733 Fax: 0852-3162322 E-mail<lzc0818@163.com>

1 PORT RJ-45 JACK WITH 10/100BASE-T MAGNETICS MODULE

P/N: YL-1T006H-36A DATA SHEET(REFERENCE ACUWA AM-001)



YONGCHENG
ELECTRONIC CORP.

Page : 1/5

Feature



- ◆ RJ-45 connector integrated with X'FMR/impedance resistor/high voltage capacitor.
- ◆ Size same as RJ-45 connector to save PCB board space
- ◆ Reduce EMI radiation, improve EMI performance.
- ◆ Pb free Soldering Heat Withstanding
- ◆ Design for 100 BASE transmission over UTP-5 cable.
- ◆ Operating temperature range : 0°C to +70°C.
- ◆ Storage temperature range: 0°Cto +85°C.


Electrical Specifications @ 25°C

Part Number	Turns Ratio TX/RX(+/-3%)	HI-POT (Vrms)	L/L(uH Max) 100KHz/0.1V	CW/W (pF Typ)	DCR (OHM MAX)		OCL(uH Min) 100KHz/0.1V with 8Ma DC BIAS
					P1-P3/P4-P6	J1-J2/J3-J6	
YL-1T006H-36A	1CT:1CT	1500	0.4	20	0.5	1.1	350

Continue

Part Number	Insertion Loss (dB Max)	Return Loss (dB MIN)			Cross talk (dB TYP)	RISE TIME (10-90%)	CMRR (dB TYP)
	0.1-100MHz	1-30MHz	40-50MHz	60-80MHz	0.1-100MHz		0.1-100MHz
YL-1T006H-36A	-1.0	-18	-15	-12	-40	2.5 ns TYP	-40

Schematic

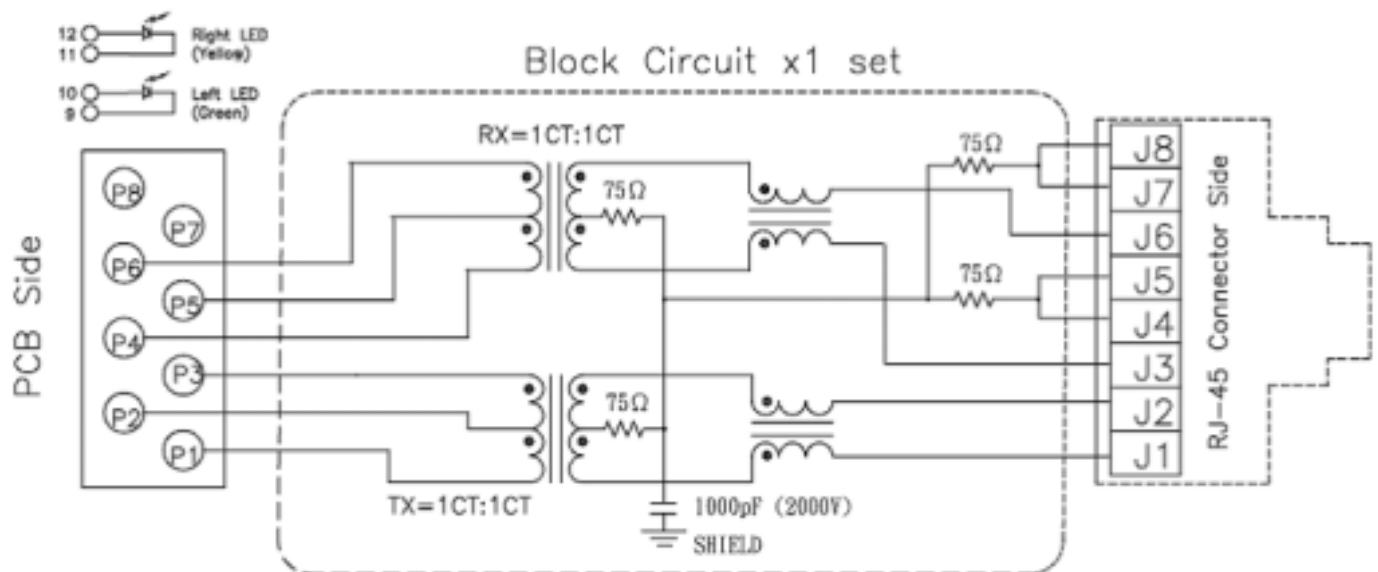

Mechanicals



1 PORT RJ-45 JACK WITH 10/100BASE-T MAGNETICS MODULE

P/N: YL-1T006H-36A DATA SHEET(REFERENCE ACUWA AM-001)



YONGCHENG
ELECTRONIC CORP.


Page : 2/5

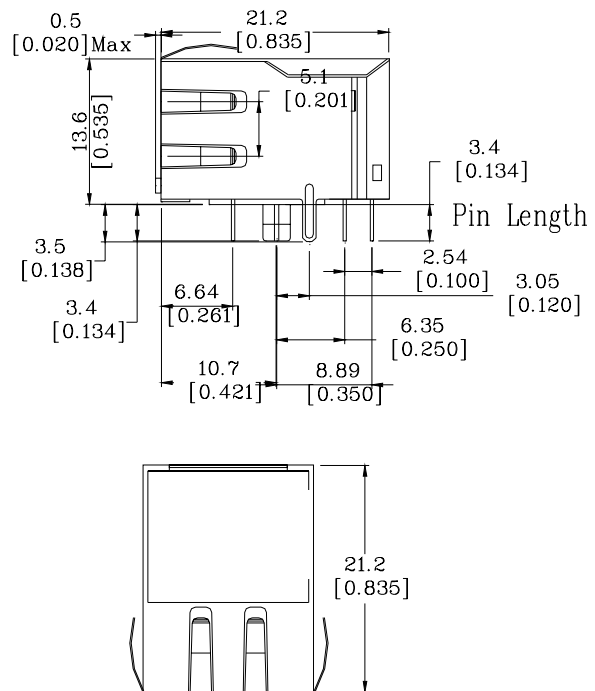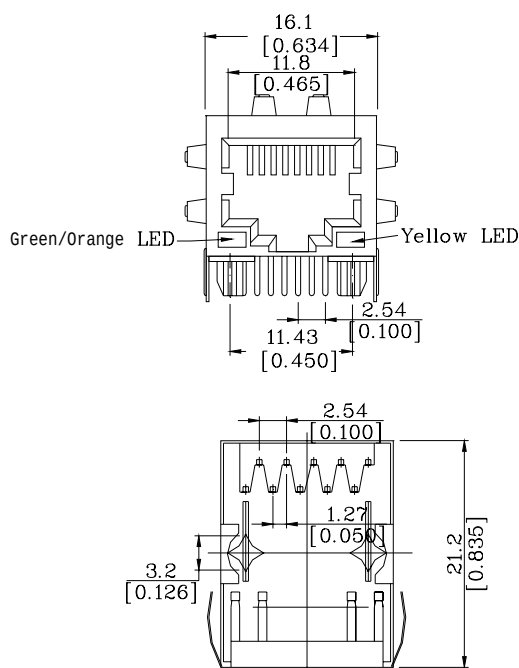

Dimensions: mm[Inches] Tolerances: ± 0.25 [0.01]

1. Plastic Material : Thermoplastic (UL 94V-0), Black Housing
2. Metal Shield : Brass , 20u inches thick Nickel
3. Spring Wire : 0.45mm Dia. Phosphor bronze with selective gold plating
4. Solder Pin : 0.4x0.4mm, Phosphor bronze with solder Plated
5. Durability : 300 Mating cycles Min.

PCB Layout Mounting Hole (Top View)

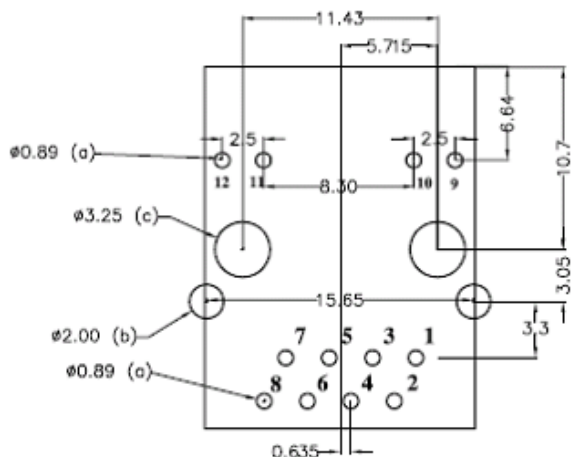

TOP VIEW(COMPONENT SIDE)
RECOMMENDED P.C.B. LAYOUT

Note:

1. Holes Type(a) P1-P8 Assign EtherNet
P9-P12 Assign LED
2. Holes Type(b) Assign Shield Cover
3. Holes Type(c) Fix Jack.
4. Holes Tolerances $\phi \begin{matrix} +0.1 \\ +0.004 \\ 0.000 \end{matrix}$
5. Holes Pitch Tolerance ± 0.08 [± 0.003].

SAMPLES TEST REPORT



Page :2/6

PART NO.		AM-001		DATE			2009/4/12						
DESCRIPTION		1 PORT RJ-45 JACK With 10/100 Base-T Magnetics Module											
ITEM	TEST EQUIPMENTS	TEST CONDITION @ 25°C	SAMPLES NO. TEST PIN	1	2	3	4	5	SPECIFICATION				
									Min	Typ	Max		
OCL (uH MIN)	3250	100KHz/0.1V with 8mA DC BIAS	P1-P3	418	396	469	512	483	350				
			P4-P6	438	472	501	488	457					
L/L (uH MAX)	3250	100KHz/0.1V with 8mA DC BIAS	P1-P3 (short J1-J2)	0.25	0.27	0.24	0.26	0.25	0.4				
			P4-P6 (short J3-J6)	0.26	0.28	0.24	0.25	0.28					
CW/W (PF TYP)	3250	100KHz/0.1V	P2-J1	15	13	18	19	16	20				
			P5-J3	18	20	16	19	17					
DCR (Ω Max)	3250		P1-P3	0.38	0.42	0.36	0.39	0.34	0.5				
			P4-P6	0.37	0.39	0.40	0.38	0.41					
			J1-J2	0.91	0.89	0.92	0.88	0.85	1.1				
			J3-J6	0.87	0.90	0.89	0.87	0.91					
HI-POT(Vrms)	GPI-5005T	1500Vrms	PRI/SEC	PASS	PASS	PASS	PASS	PASS	1S				
TURN RATIO (+/-3%)	CA8120A	1MHz/sine wave	P1-P3:J1-J2	PASS	PASS	PASS	PASS	PASS	1CT:1CT				
			P4-P6:J3-J6	PASS	PASS	PASS	PASS	PASS					

SAMPLES TEST REPORT



Page 3/6

PART NO.		AM-001		DATE			2009/4/12						
DESCRIPTION		1 PORT RJ-45 JACK With 10/100 Base-T Magnetics Module											
ITEM	TEST EQUIPMENTS	TEST CONDITION @ 25°C	SAMPLES NO. TEST PIN	1	2	3	4	5	SPECIFICATION				
			Min	Typ	Max								
Insertion Loss (dB MAX)	8711/8712	0.1-100 MHz	P1-P3 TO J1-J2	-0.82	-0.86	-0.9	-0.84	-0.79	-1.0				
			P4-P6 TO J3-J6	-0.78	-0.83	-0.89	-0.84	-0.85					
Return Loss(dB MIN)	8711/8712	1-30 MHz	P1-P3 TO J1-J2	-24.5	-23.9	-25.1	-23.6	-24.1	-18				
			P4-P6 TO J3-J6	-25.3	-24.6	-23.5	-23.9	-24.3					
		40-50 MHz	P1-P3 TO J1-J2	-20.6	-19.8	-20.2	-19.1	-19.5	-15				
			P4-P6 TO J3-J6	-19.3	-20.4	-19.0	-19.6	-20.0					
		60-80MHz	P1-P3 TO J1-J2	-16.1	-15.6	-15.9	-14.8	-15.5	-12				
			P4-P6 TO J3-J6	-15.3	-15.7	-14.6	-15.9	-16.2					
		CMRR (dB TYP)	8711/8712	0.1-100 MHz	P1-P3 TO J1-J2	-51.2	-52.6	-52.1	-51.6	-52.9	-40		
					P4-P6 TO J3-J6	-50.8	-51.5	-51.3	-52.7	-52.1			
Cross Talk (dB TYP)	8711/8712	0.1-100 MHz	TX TO RX	-51.5	-50.5	-49.8	-50.8	-51.2	-40				






YONGCHENG ELECTRONIC CORP.

SAMPLES PACK SPECIFICATIONS

Page: 5/5



CUSTOMER	ACUWA	CUST P/N.	AM-001
ITEM	TRANSFORMER	DESCRIPTION	YL-1T006H-36A
PART NO.	868-00360	DATE	2009/04/12

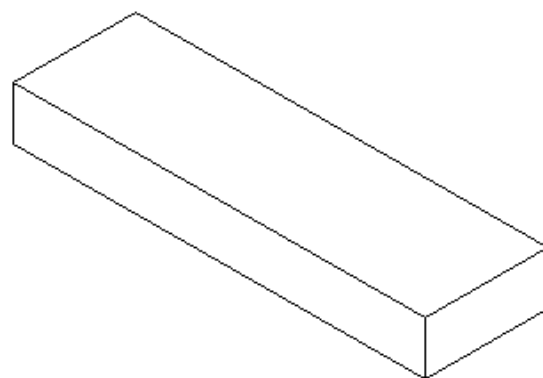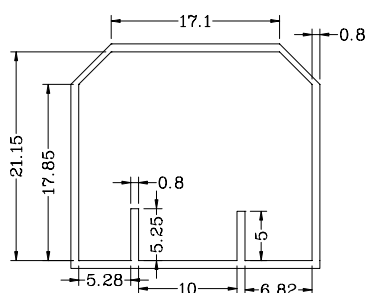

Units:mm Tolerances: xx.xx0±0.25
x.x0±0.25

TUBE MECHANICAL DIMENSION

INNER CARTON :540*160*70

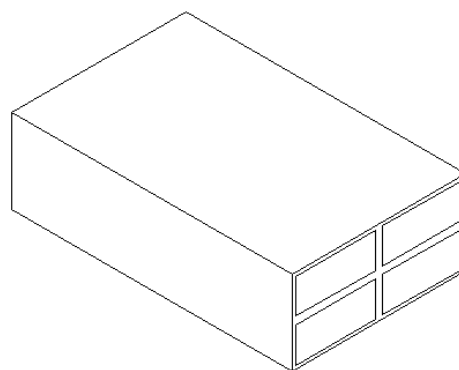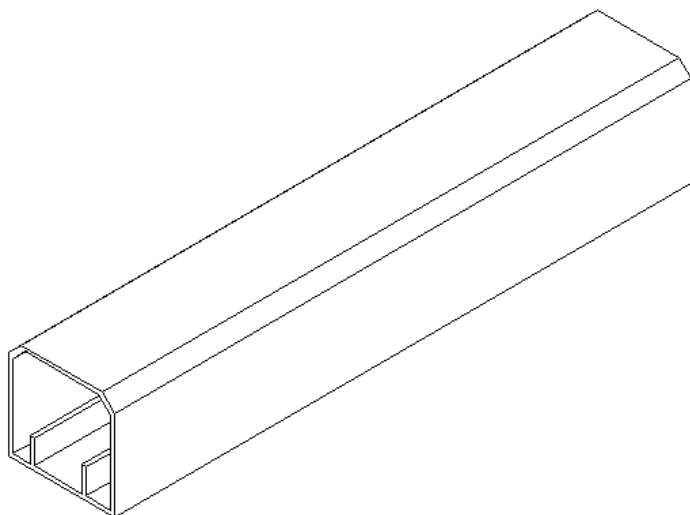

TUBE =22 PCS

INNER CARTON=18 TUBE=18*22=396 PCS

EXPORT CAPTON : 560*340*160

EXPORT CARTON=4INNER CARON=4*396=1584 PCS

REMARK:	APPROVAL	CHECKED	DRAWN BY
	LiaoZongCheng		Qingxiaobin