





DIMENSIONS:



ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-2 = PIN 3-4 = 6 OHM MAX.
2. INDUCTANCE (@10KHZ, 1Vrms) : PIN 1-2 = PIN 3-4 = 20mH MIN.
3. TURN RATIO (@18KHZ, 1Vrms) : PIN 1-2 : PIN 4-3 = 1 ± 1%
4. HI-POT (@1875VAC, 1mA, 2SEC) : PRI-SEC
5. RoHS COMPLIANT

SCHEMATIC:

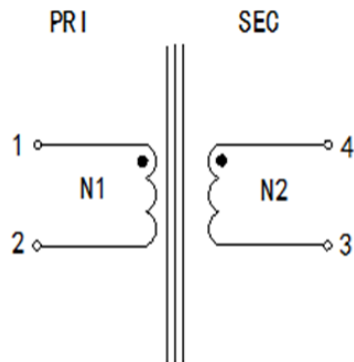

序號	物料名稱	規格描述	參考供應商及UL編號
1	磁芯	EE8. 3,	通达，力磁
2	骨架	EE8. 3卧式 (PIN2+2) , Phenolic, T375J	長春電木, E59481(S)
3	膠帶	Mylar Tape, Yellow, 130°C	亞華，E178516
4	漆包線	Magnet wire, 2UEW/Nat，155°C	深港，E239508
5	絕緣漆	T4260 (a) /155°C	TaiHu，E228349

TITLE			TRANSFORMER MODULE									UNIT
												MM
歐貝斯 OBEST INT, L LTD	Customer Specification NO.											DWG. NO.
			X1									/
	Part NO.	AS-076	NO.	DESCRIPTION	DATE	NO.	DESCRIPTION	DATE				SHEET 1 OF 2
			REVISIONS									