




Feature

- ◆ Pb free Soldering Heat Withstanding.
- ◆ Operating temperature range : -30°C to +70°C.
- ◆ Storage temperature range: -30°C to +70°C.

Electrical Specifications @ 25°C

Part Number	Turns Ratio (+/-2%)	OCL(mH TYP) 10KHz/0.05V	DCR (Ω +/-15%)	HI-POT (Vrms Min)	Lk(uH Max) 100KHz/0.05V
		1-6=3-4	1-6		1-6(short 3-4)
YI-06S12A	1:1	10.5-22.5	1.5	500	3

Schematic

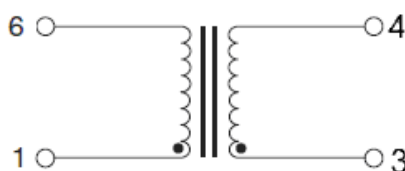

Mechanical

