

承認書

APPROVAL SHEET

CUSTOMER : Acuwa CUSTOMER NO : AS-162

PRODUCT : COMMON CHOKE

PART NO : AS-162 Comply RoHS: ☒

DATE : 2017.3.8 SPEC NO : OA-170308A

TESTED BY : 吕爱章 CHECKED BY : 徐春明

SALES BY : APPROVED BY : 徐春明

公司承認章	客戶承認章


变更历史表

版本	日期	变更原因	变更内容	制定人	审核人
A	2017.3.8	首次发行		李萍	徐春明

A. ELECTRICAL SPECIFICATIONS :

1. DCR : PIN 1-4 = PIN 2-3 = 550mΩ MAX.
2. INDUCTANCE(@10kHz,100mV) : PIN 1-4 = 2-3 = 4.7mH +50%/-30%
3. Lk(@10kHz,100mV) : 1-4 (2-3 SHORT) = 0.5μH MAX.
4. TURNS RATIO & POLARITY(@17.75kHz,1V) : PIN 1-4 : 2-3 = 1:1 ±1%
5. WORKING CURRENT UP TO 350mA R.M.S.
6. HI-POT (@1500VAC, 1mA, 60SEC) : WINDING TO WINDING
7. RoHS COMPLIANT
- 8.MEET EN60950 INSULATION


B. SCHEMATIC:

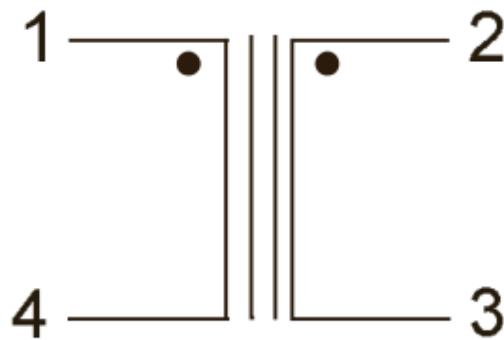

DRAWN BY	CHECKED BY	APPROVED BY	CUSTOMER: Acuwa	DATE	
			PART NO: AS-162	PAGE	

OBEST INT,L LTD

C. DIMENSIONS & MARKING:

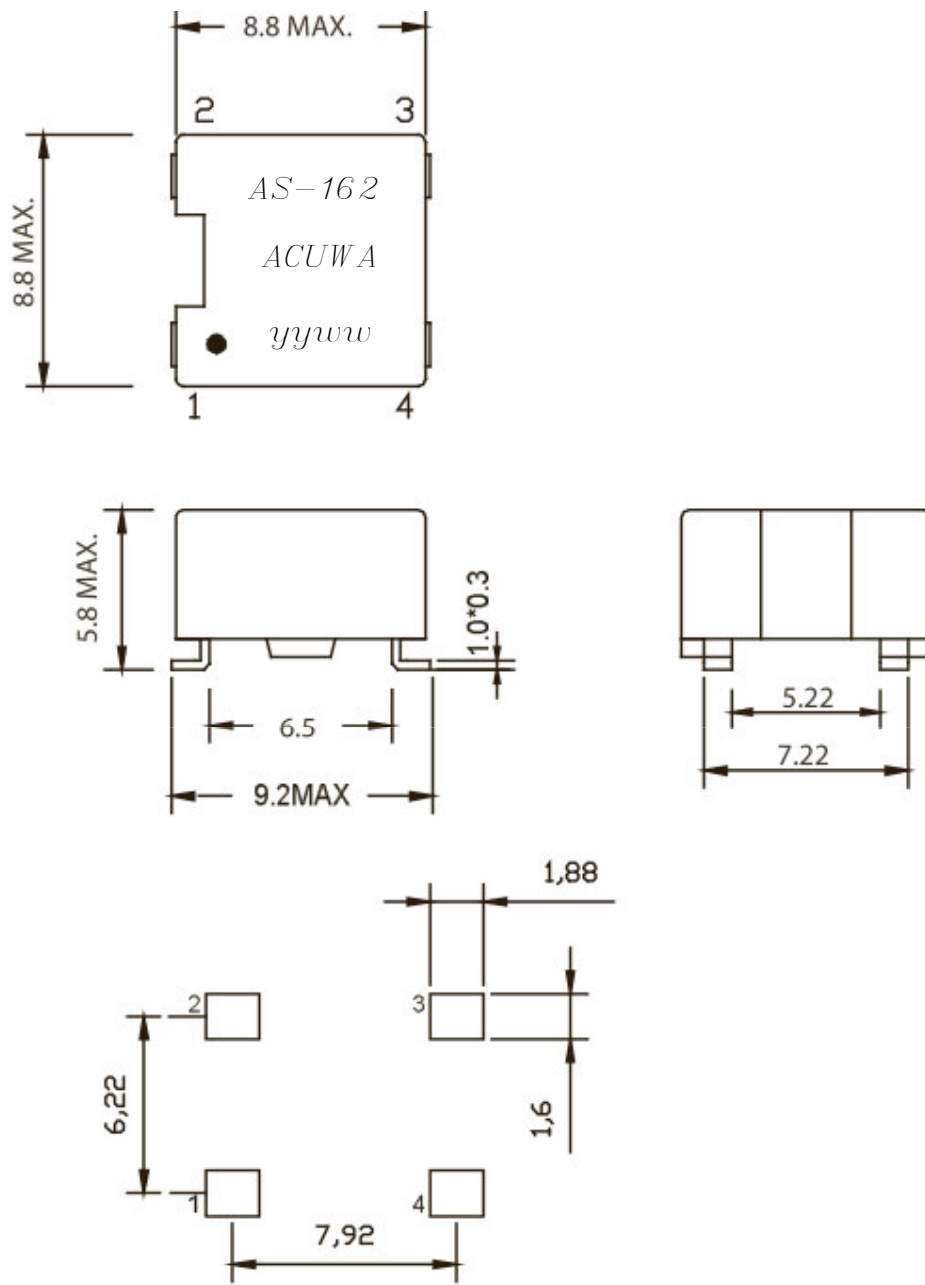

SUGGESTED PAD LAYOUT



Unless otherwise specified all tolerances are +/-0.5

DRAWN BY	CHECKED BY	APPROVED BY	CUSTOMER: Acuwa	DATE	
			PART NO: AS-162	PAGE	

OBEST INT,L LTD

D. PACKAGE CRITERION:

1.Reel:

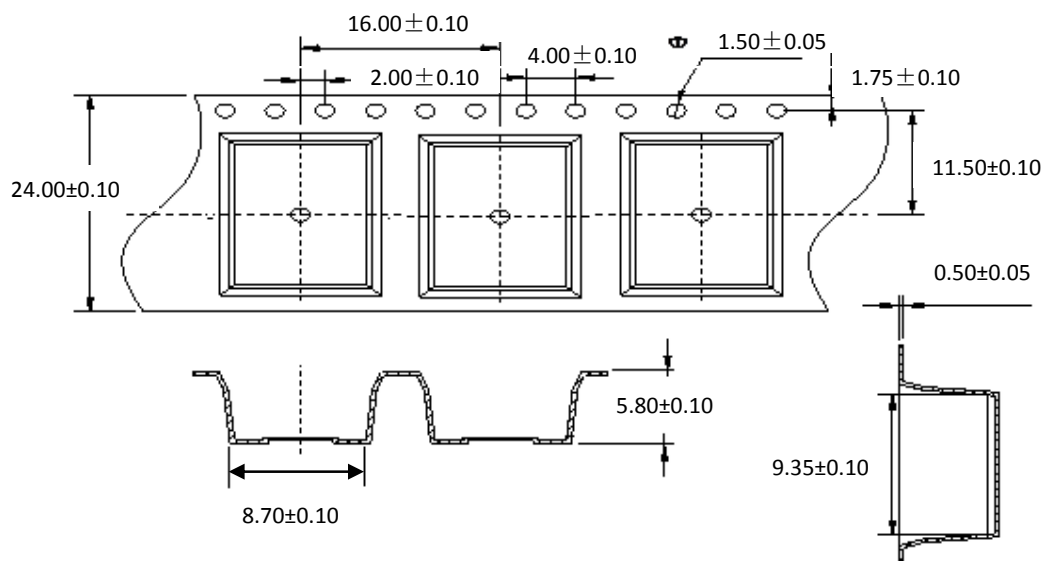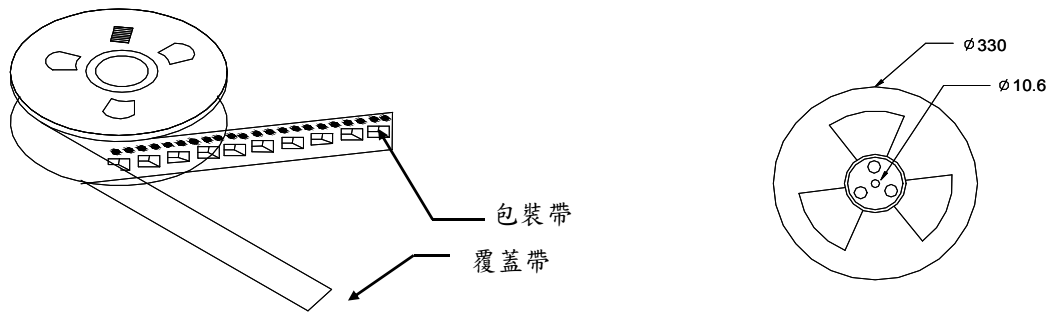

2.Package Quantity:

One Roll=500Pcs

One Inner Box =2000Pcs(4 rolls)

One carton =4000Pcs(2 boxes)

units: mm

3.MSL LEVEL: 1

DRAWN BY	CHECKED BY	APPROVED BY	CUSTOMER: Acuwa	DATE	
			PART NO: AS-162	PAGE	

OBEST INT,L LTD