

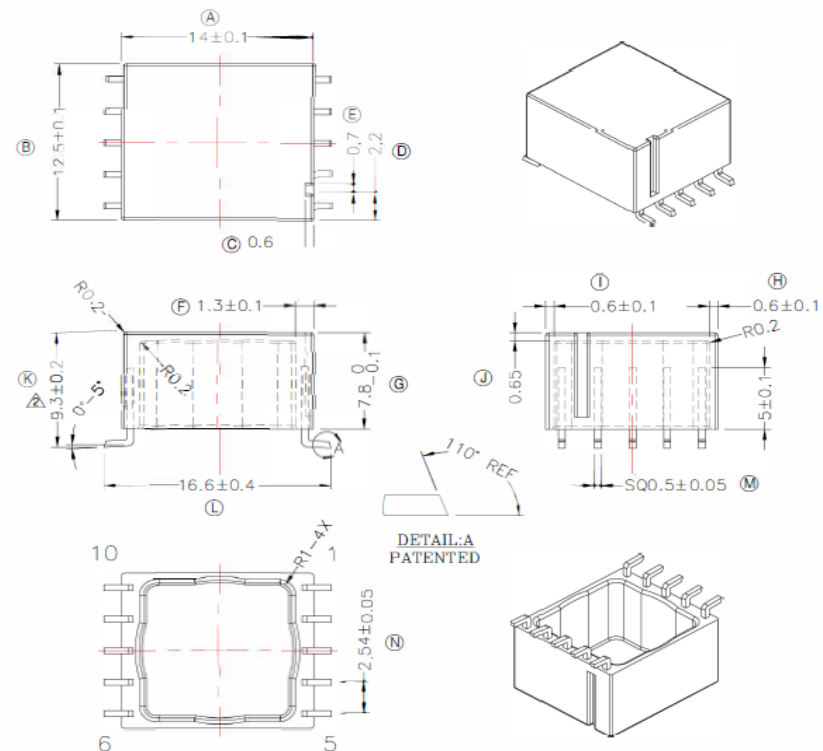


DIMENSIONS:

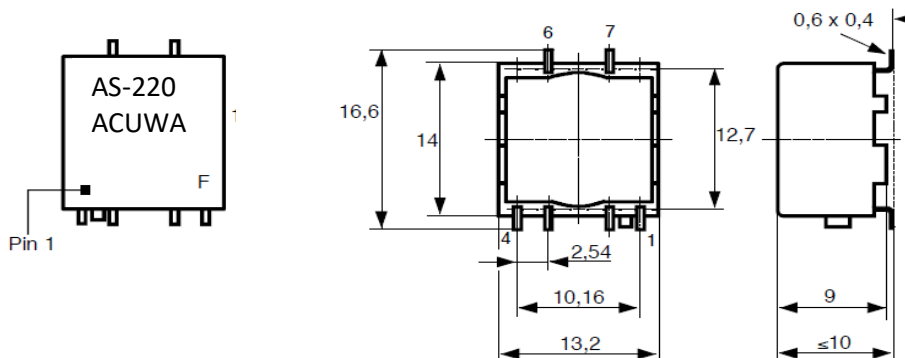

SCHEMATIC:

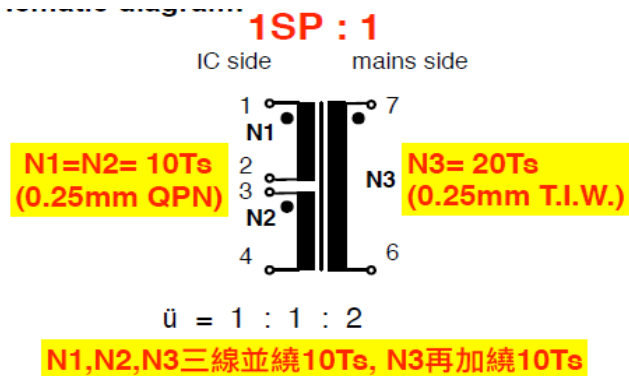

Operational data/characteristic data (nominal values):

$f = 10 \dots 1000 \text{ kHz}$

$$I_{RMS} < 100 \text{ mA (50/60Hz)}$$
$$R_{Cu1} \leq 135 \text{ m}\Omega ; R_{Cu2} \leq 135 \text{ m}\Omega, \quad R_{Cu3} \leq 230 \text{ m}\Omega$$

Operating temperature: -40 °C ... +120 °C

Storage temperature: -40 °C ... + 85 °C

TITLE			10/100/1000 BASE-T SINGLE PORT TRANSFORMER MODULE						UNIT		
									MM		
歐貝斯 OBEST INT, L LTD	Customer Specification NO.								DWG. NO.		
		X1							/		
	Part NO.	AS-220	NO.	DESCRIPTION	DATE	NO.	DESCRIPTION	DATE	SHEET 1 OF 2		
			REVISIONS								