

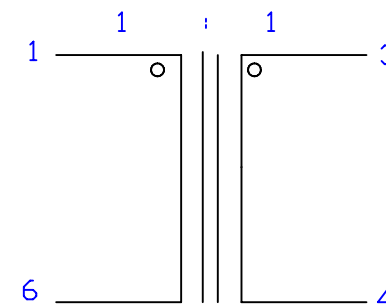
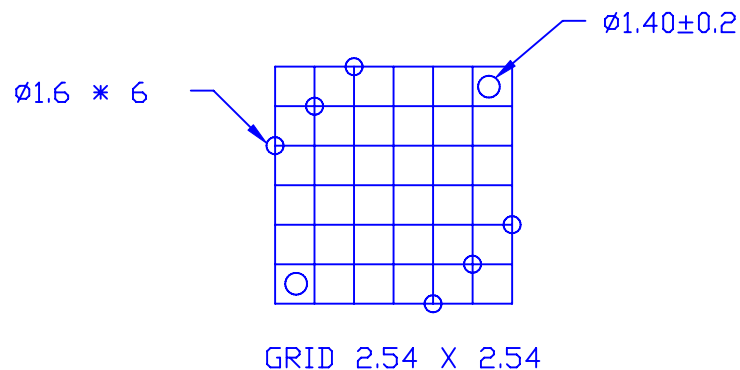


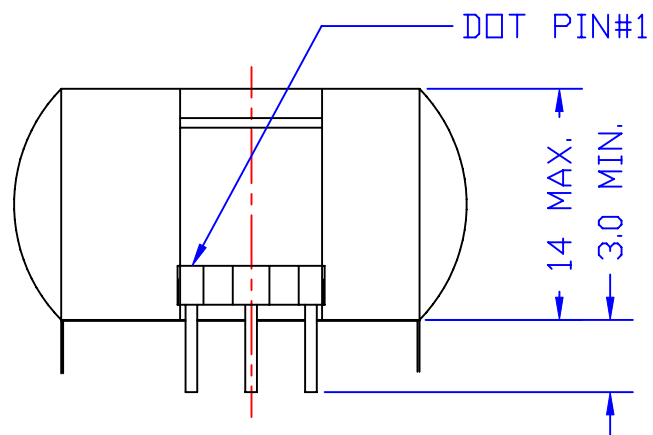

## ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-6 = 4  $\Omega$ HM MAX.  
PIN 3-4 = 4  $\Omega$ HM MAX.
2. INDUCTANCE : (@1KHZ, 0.1Vrms)  
1-6 = 3-4 = 120 mH MIN.
3. INTERWINDING CAP : (@ 1KHZ, 0.1Vrms)  
1-3 = 420 Pf  $\pm 30\%$
4. TURN RATIO : (@12KHZ, 1Vrms) 1-6 : 3-4 = 1  $\pm 1\%$
5. HI-POT = 500VAC, 1mA, 2SEC (PRI-SEC)

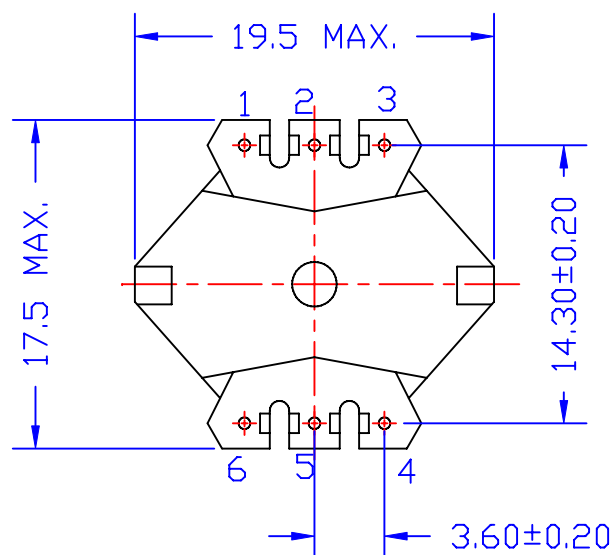

|           |             |            |       |        |        |                                                                                        |                 |              |
|-----------|-------------|------------|-------|--------|--------|----------------------------------------------------------------------------------------|-----------------|--------------|
| C         | INDUCTANCE  | 11/06/2007 | PAIR  | WILLIE | EUGENE | <b>Atech®</b><br>Atech Technology Co., Ltd.<br>TEL: (02) 2794-6667 FAX: (02) 2794-8004 | TITLE           | TRANSFORMER  |
| B         | SPEC.       | 07/15/2005 | BART  | AL     | SUEDY  |                                                                                        | DWG. NO.        | ATC-00-036   |
| A         | MARKING     | 05/14/01   | DOLLY |        | SUEDY  |                                                                                        |                 |              |
|           | RELEASE     | 12/01/00   | PAIR  |        | SUEDY  | UNITS: M/M                                                                             | SAFETY          | SHEET 1 OF 1 |
| NO.       | DESCRIPTION | DATE       | BY    | CHK    | APPD   | DATE                                                                                   | P/N: CTX806000A | DRAW Pair    |
| REVISIONS |             |            |       |        |        | 12/01/00                                                                               |                 |              |