

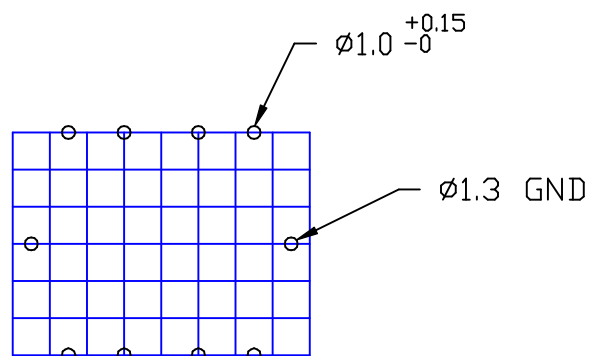
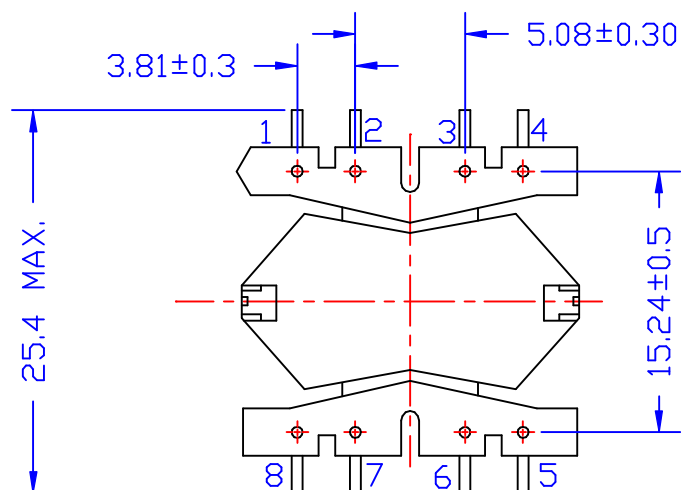


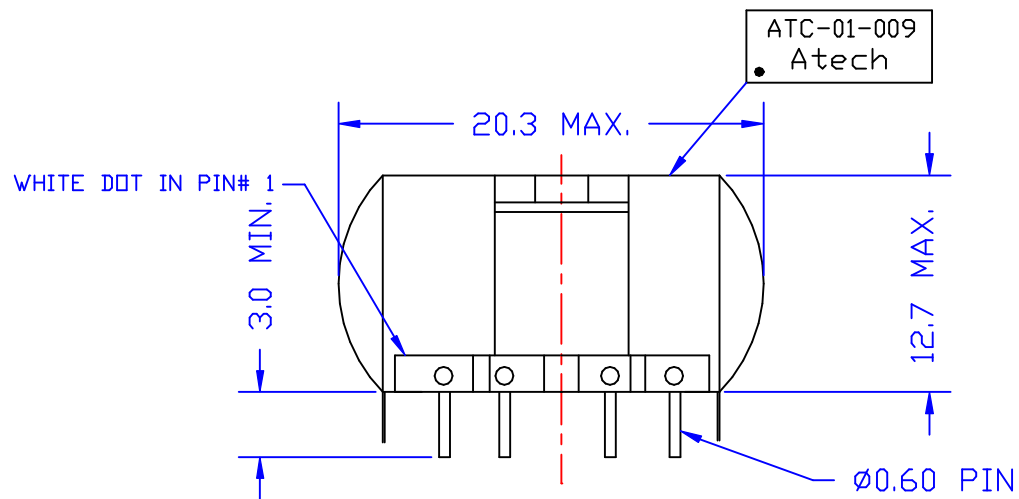

GRID 2.54*2.54

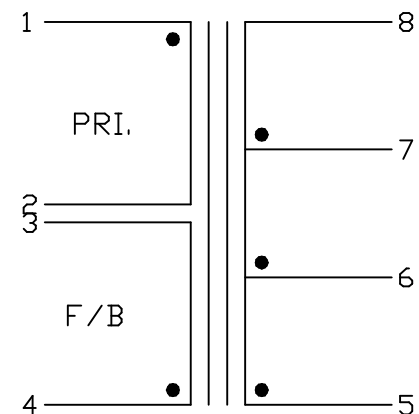

ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 1-2 = 40m OHM MAX.
PIN 3-4 = 0.36 OHM MAX.
PIN 5-8 = 2.2 OHM MAX.
- INDUCTANCE : (@1 KHZ, 0.1 Vrms) PIN 1-2 = 12.2 uH ± 5%
- LEAKAGE INDUCTANCE : (@100 KHZ, 0.5 Vrms, W/H PIN 5-8 SHORT)
PIN 1-2 = 0.5 uH MAX.
- TURN RATIO : (@100 KHZ, 0.5 Vrms) PIN 5-8 : 1-2 = 8.3 ± 1%
PIN 5-8 : 4-3 = 5.77 ± 1%
- HI-POT : (@1000 Vrms, 1 mA, 2 SEC) PIN 1-8, 1-3, 1-CORE
PIN 3-8, 3-CORE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE DC/DC TRANSFORMER	
							DWG. NO. ATC-01-009	
	RELEASE	06/18/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						06/18/01		