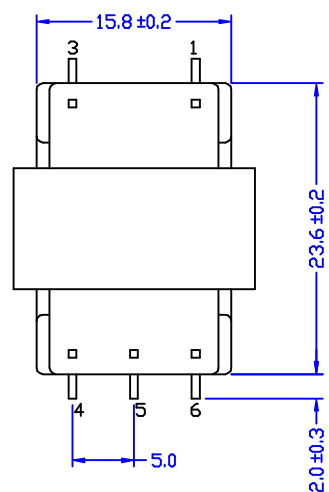


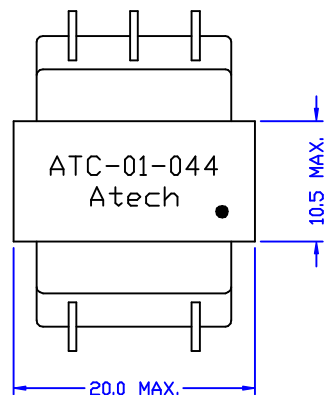


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 7.18 OHM $\pm$ 12%
PIN 4-6 = 6.32 OHM $\pm$ 12%
2. INDUCTANCE (@1KHZ, 1.5Vrms) : PIN 1-3 = 185mH MIN.
3. INSERTION LOSS (@1KHZ, 0dBm, 4-6 W/H 33 OHM LOAD) : PIN 1-3 = 3dB MAX.
(@20HZ) : PIN 1-3 = 3dB MAX.
(@20KHZ) : PIN 1-3 = 3dB MAX.
4. TURN RATIO (@40KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 = 1 $\pm$ 1%
5. HI-POT (@1000VAC, 1mA, 2SEC) : PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8804	TITLE 33 : 33 TRANSFORMER	
							DWG. NO. ATC-01-044	
	RELEASE	12/19 /2001	DOLLY	JEFF	SUE DY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/19/01		DRAW <i>Pair</i>
REVISIONS								