

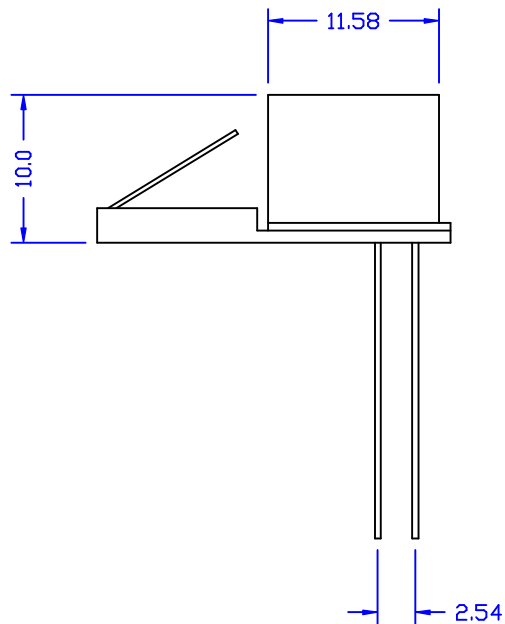


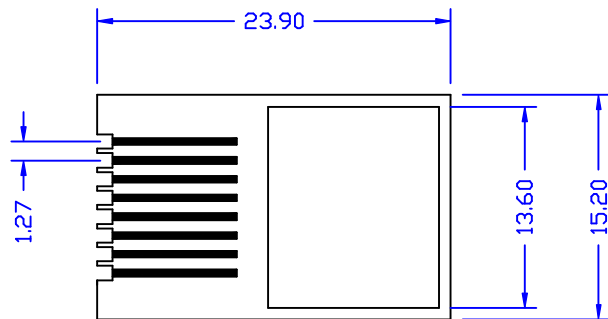

TOLERANCES : ± 0.25

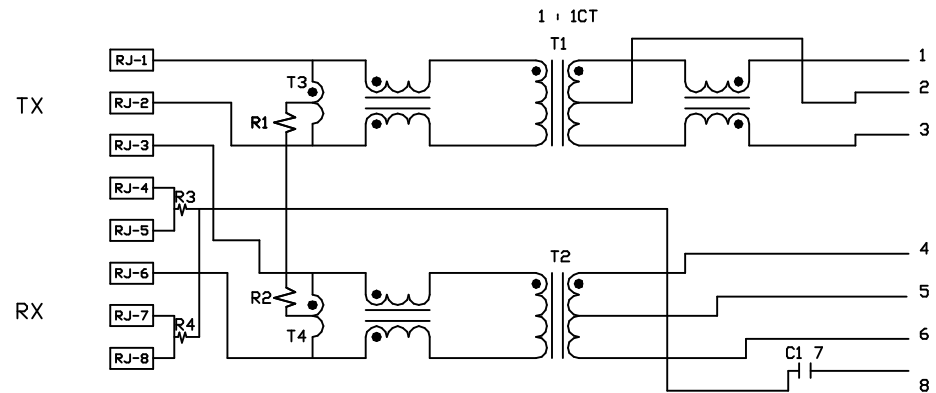

ELECTRICAL SPECIFICATIONS : (25°C)

1. TURN RATIOS ($\pm 3\%$) : TX & RX 1CT : 1
2. INDUCTANCE : 350uH MIN @100KHZ 0.1Vrms, 8mA DC BIAS.
3. RISE TIME 2.5 nS TYPICAL.
4. INSERTION LOSS (@0.1MHZ~100MHZ) : 1.1dB MAX.
5. RETURN LOSS (dB MIN) : @0.1-60MHZ @60-80MHZ @80-100MHZ
-18 -15 -12
6. CROSS TALK (dB MIN) : @0.1-60MHZ @60-80MHZ @80-100MHZ
-43 -30 -38
7. CMRR (dB MIN) : @0.1-80MHZ @80-100MHZ
-36 -33
8. HI-PDT (PRI-SEC) : @1500Vrms, 1mA, 2SEC

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 10/100 BASE LANMATE	
								DWG. NO. ATC-01-047	
	RELEASE	12/25/2001	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						12/25/01		DRAW <i>Pair</i>	