
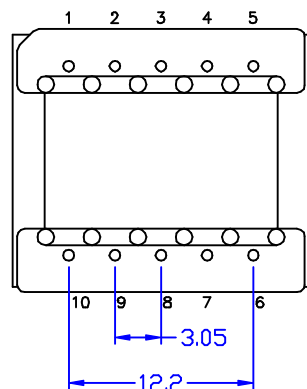

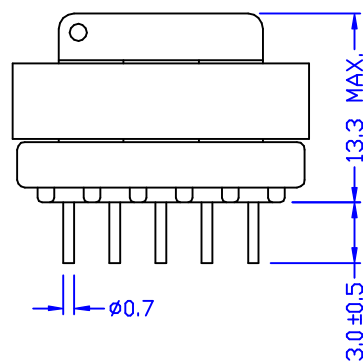
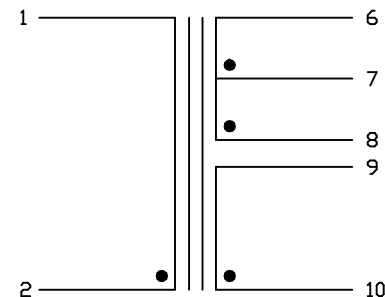



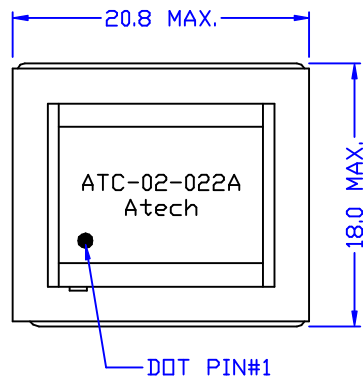

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-1 = 90 mOHM MAX.
PIN 7-6 = 144.5 mOHM MAX.
PIN 8-7 = 300.5 mOHM MAX.
PIN 10-9 = 144.5 mOHM MAX.
- INDUCTANCE (@1 KHZ, 0.25Vrms) :
PIN 2-1 = 72.5uH ±6%.
- LEAKAGE INDUCTANCE (@1KHZ,0.25Vrms) :
PIN 2-1 (6-8, 10-9 SHORT) = 12uH MAX.
- TURN RATIO (@950KHZ, 1Vrms) :
PIN 8-6:2-1 = 2 ±5%.
PIN10-9:2-1 = 1 ±5%.
PIN 8-7:7-6 = 1 ±5%.
- HI-POT : (@1.8KVAC,5mA,3S) = PIN 1-6 , 1-9.
(@600VAC,5mA,3S) = 1-CORE , 6-CORE , 9-CORE.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE TRANSFORMER	
								DWG. NO. ATC-02-022A	
	RELEASE	01/29/2004	BART	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 01/29/04			
REVISIONS								DRAW <i>Pair</i>	