
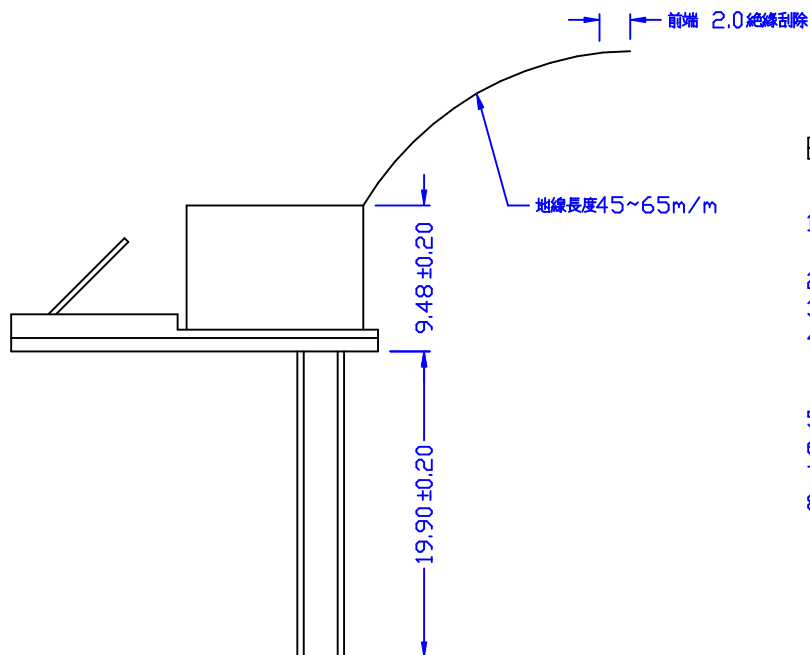
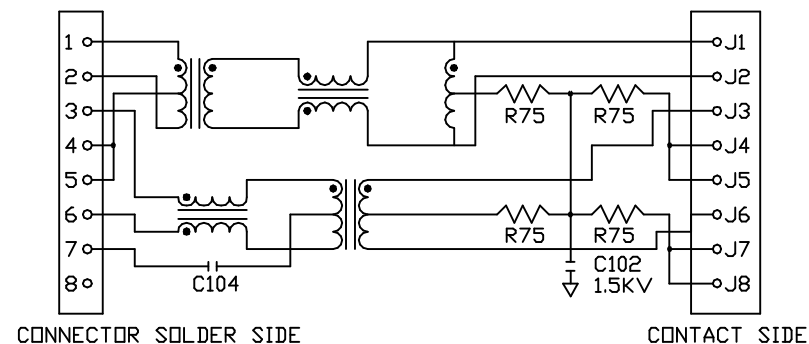


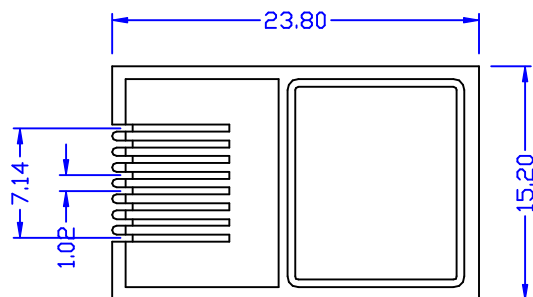

ELECTRICAL SPECIFICATIONS (25°C) :

- TURN RATIOS (±5%) : PIN 1-2 : J1-J2 = 1CT : 1CT
PIN 3-6 : J3-J6 = 1CT : 1CT
- INDUCTANCE : 400uH MIN. @100KHZ/0.1Vrms
- INSERTION LOSS (dB MAX) : 1-100MHZ = -1.0dB
- RETURN LOSS (dB MAX) : 1-30MHZ = -18dB
30-60MHZ = -16dB
60-100MHZ = -10dB
- CROSS TALK (dB MIN) : 1-100MHZ = -35dB
- HI-POT (PRI-SEC) : @1500Vrms
- COMM TO COMM REFLECTION (dB MIN) : 1-100MHZ = -38dB
- COMM TO DIFF REFLECTION (dB MIN) : 1-100MHZ = -35dB

TOLERANCE : ± 0.20

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE 10/100 BASE TRANSFORMER	
								DWG. NO. ATC-02-029	
	RELEASE	06/03/2002	DOLLY	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/03/02			
REVISIONS									
								DRAW	Pair