
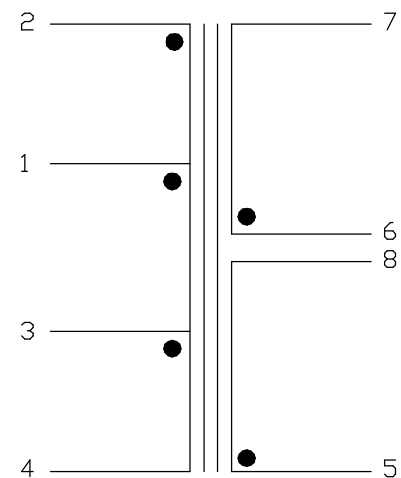


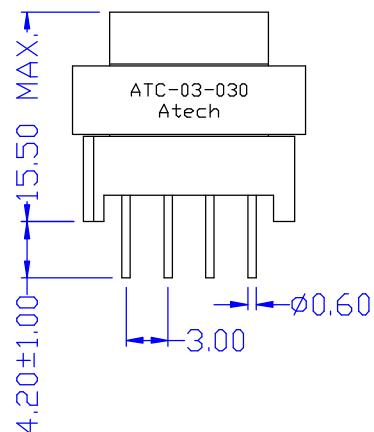




ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 3 OHM MAX., PIN 2-1 = 180 mOHM MAX., PIN 6-7 = 180 mOHM MAX.
PIN 5-8 = 8 mOHM MAX.
- INDUCTANCE (@10KHz, 1Vrms) : PIN 1-4 = 1.0mH ± 5%
- LEAKAGE INDUCTANCE (@100KHz, 1Vrms) : PIN 1-4 (6-7, 5-8 SHORT) = 100uH MAX.
- TURN RATIO (@5KHz, 100mVrms) : PIN 1-4 : 2-1 = PIN 1-4 : 6-7 = 12 ± 3%
PIN 1-4 : 5-8 = 30 ± 3%
- HI-POT : (<3000VAC, 1mA, 2SEC, PIN 5-6 SHORT) : PRI-SEC
(@500VDC, 100mOHM, 2SEC) : PIN 6-7 , PRI-SEC , SEC-CORE

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE TRANSFORMER
B	ALL	08/08/2003	RORY	AL	SUEDY			DWG. NO. ATC-03-030
A	20.7 MAX.	07/23/2003	RORY	AL	SUEDY			
	RELEASE	05/15/2003	RORY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 05/15/03		DRAW Pair
REVISIONS								