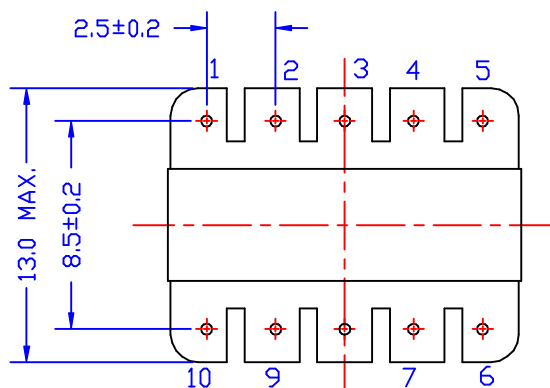
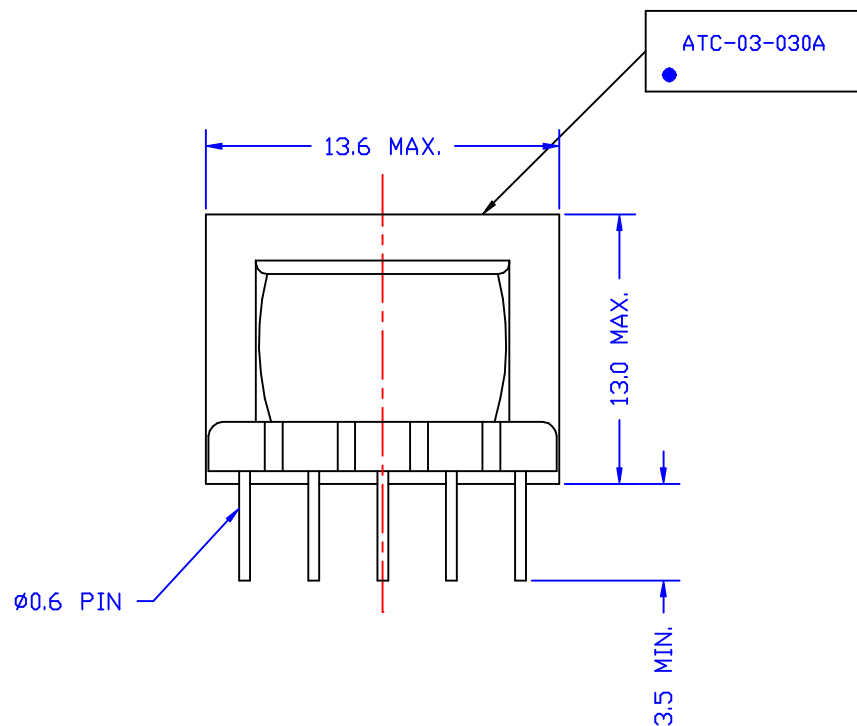


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 120 mΩ MAX., PIN 1-4 = 2.3 Ω MAX.
PIN 6-10 = 25 mΩ MAX., PIN 7-9 = 150 mΩ MAX.
- INDUCTANCE (@1KHz, 1Vrms) : PIN 1-4 = 2mH ± 20%
- LEAKAGE INDUCTANCE (@25KHz, 1Vrms) :
PIN 1-4 (6-7, 9-10 SHORT) = 100μH MAX.
- SELF RESONANT FREQ (@100K, 0.1Vrms) : PIN 1-4 = 600KHz MIN.
- TURN RATIO (@550K, 1Vrms) : PIN 9-7 : 10-6 = 2.5 ± 2%
PIN 1-2 : 10-6 = 2.5 ± 2% , PIN 4-1 : 10-6 = 30 ± 2%
- HI-POT (@1KVAC, 1mA, 2SEC) : PIN 1-9 , PIN 1-10

				Atech®		TITLE TRANSFORMER	
B	ADD HI-POT	10/09/2003	RORY	AL	SUEDY	Atech Technology Co., Ltd.	
A	MARKING	09/04/2003	PAIR	AL	SUEDY	DWG. NO. ATC-03-030A	
	RELEASE	08/16/2003	RORY	KEVIN	SUEDY	UNITS: M/M	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	SAFETY	
REVISIONS						DATE 08/16/03	SHEET 1 OF 1 DRAW Pair