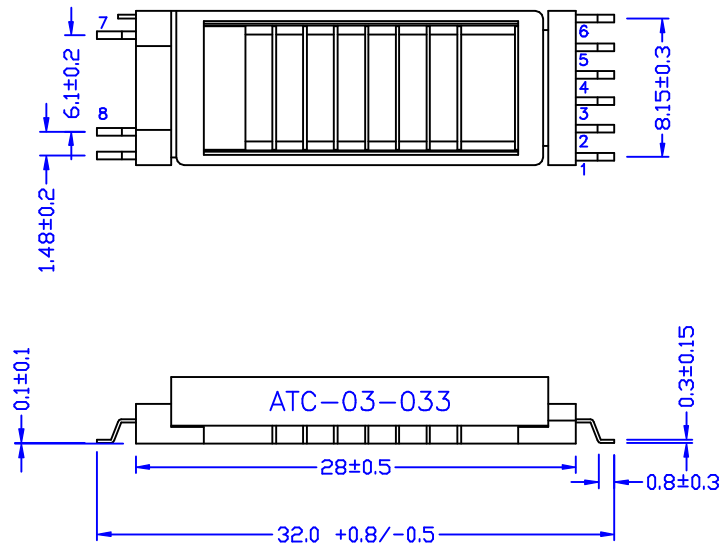


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 6-7 = 970 OHM $\pm$ 10% , PIN 4-2 = 116 mOHM $\pm$ 15%
2. INDUCTANCE (@1KHz, 1Vrms(SERIES)) : PIN 6-7 = 527mH $\pm$ 10%
PIN 4-2 = 50uH $\pm$ 15%
3. LEAKAGE INDUCTANCE (@50KHz, 1Vrms) : PIN 6-7(4-2 SHORT) = 230mH MAX.
PIN 4-2(6-7 SHORT) = 22uH MAX.
4. HI-POT (@500VAC, 3mA, 1MIN) : PIN 4-6 , PIN 4-CORE
5. POLARITY (@10KHz, 1Vrms) : PIN 6-7 : 4-2
6. OPEN VOLTAGE (@DC-IN7.5V, 0.5A) : VOUT = 2.0KVAC MIN.

						Atech®		TITLE
						Atech Technology Co., Ltd.		INVERTER
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
								ATC-03-033
RELEASE		08/25/2003	RDY	WILLIE	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO: DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE		DRAW
						08/25/03		Pair