
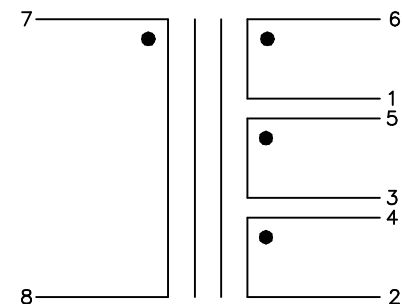
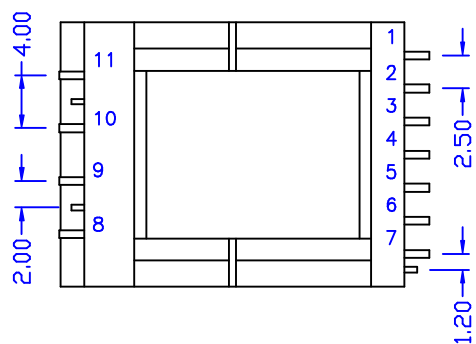
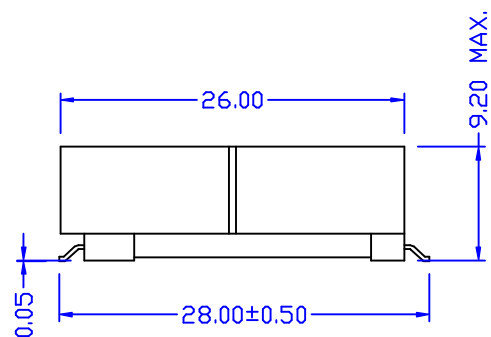


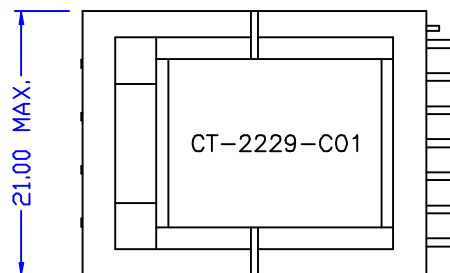

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 5-3 = 4-2 = 40.5m OHM $\pm$ 12% , PIN 6-1 = 23m OHM TYP.
PIN 7-8 = 866 OHM $\pm$ 12%
2. INDUCTANCE (@1KHz, 1Vrms) : PIN 5-3 = 4-2 = 7.8uH $\pm$ 15%
PIN 6-1 = 1.07uH TYP. , PIN 7-8 = 225.5mH $\pm$ 15%
3. POLARITY : PIN 5-4-6-7
4. HI-POT (@500VAC, 1mA, 2SEC) : PIN 5-7, 4-7, 6-7, 5-4, 5-6, 4-6
(@1500VAC, 1mA, 2SEC) : PIN 5-CORE, 4-CORE, 7-CORE

						Atech® Atech Technology Co., Ltd. TEL:02/2794-6667 FAX:02/2794-9004		TITLE	TRANSFORMER
								DWG. NO.	ATC-03-042
A	MARKING	12/23 2003	BART	YEN	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
	RELEASE	08/13 /2003	RORY	WILLIE	SUEDY	DATE 08/13/03			
NO.	DESCRIPTION	DATE	BY	CHK	APPD			DRAW	Pair
REVISIONS									