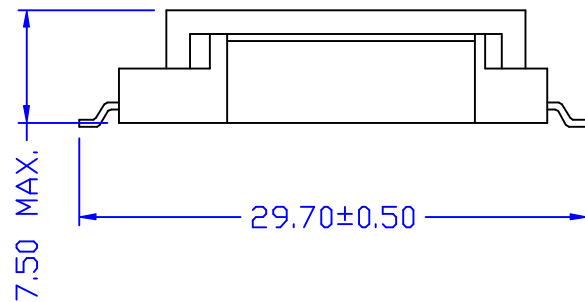
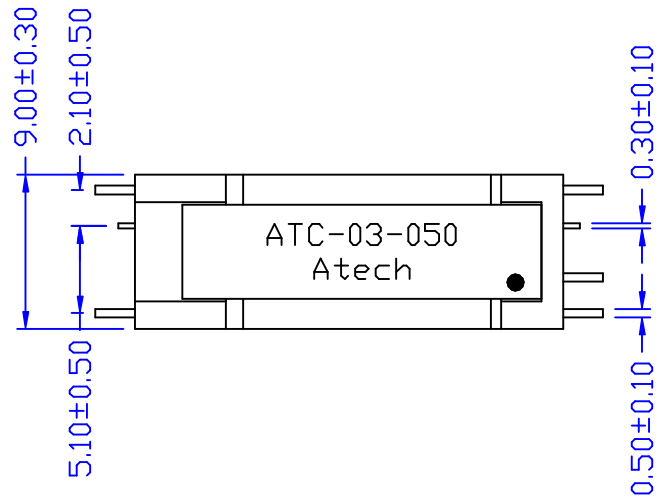


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-4 = 900 OHM $\pm$ 20% , PIN 2-1 = 226 mOHM $\pm$ 20%
- INDUCTANCE (@1KHz, 1Vrms) : PIN 3-4 = 1.26H MIN.
PIN 2-1 = 263uH MIN.
- LEAKAGE INDUCTANCE (@50KHz, 1Vrms) :
PIN 3-4 (2-1 SHORT) = 128.5mH $\pm$ 10%
PIN 2-1 (3-4 SHORT) = 24.8uH $\pm$ 15%
- Q (@50KHz, 1Vrms) : PIN 3-4 (2-1 SHORT) = 11MIN.
- OPEN VOLTAGE (@DC-IN 8V, 0.5A) : VOUT = 1.8KVAC MIN.
- POLARITY (@10KHz, 1Vrms) : PIN 3-4 : 2-1
- HI-POT (@500VAC, 3mA, 1MIN) : PRI-SEC , PRI-SEC
(@1600VAC, 3mA, 2SEC) : SEC-CORE
(@500VDC, 100 MOHM, 1MIN) : PRI-SEC , PRI-CORE , SEC-CORE

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE TRANSFORMER
							DWG. NO. ATC-03-050
	RELEASE	10/14/2002	RORY	AL	SUEDY	UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	
REVISIONS						10/14/03	
							SHEET 1 OF 1
							DRAW <i>Pair</i>