
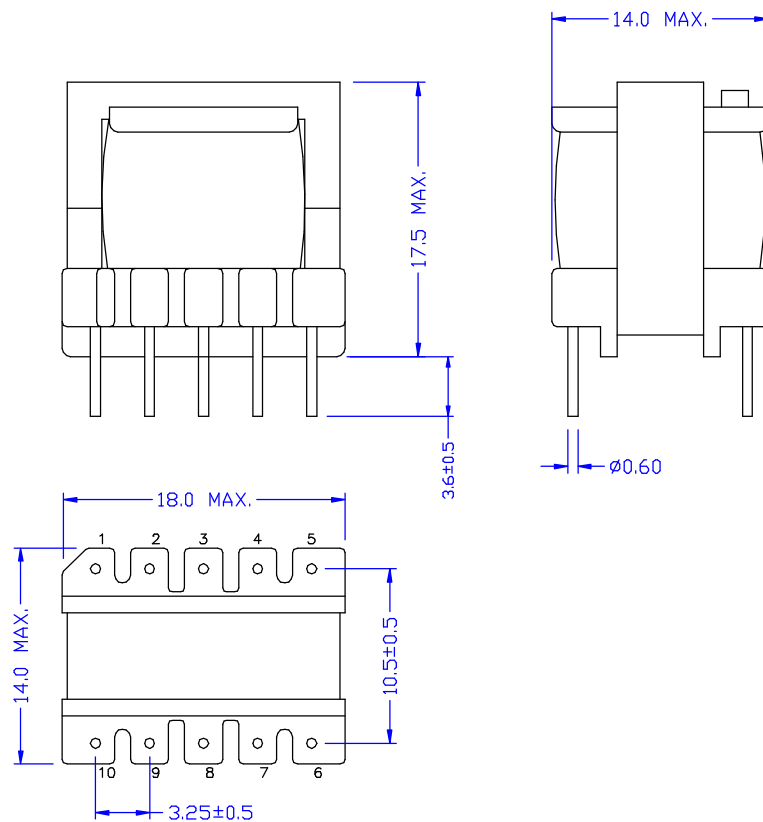
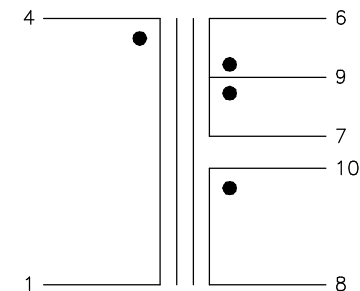





ELECTRICAL CHARACTERISTICS :

1. DCR :

PIN 1-4 = 1.4 OHM $\pm$ 15%
 PIN 6-9 = 20m OHM MAX.
 PIN 7-9 = 20m OHM MAX.
 PIN 8-10 = 25m OHM MAX.

2. INDUCTANCE (@10KHZ, 1Vrms) :

PIN 1-4 = 1 mH $\pm$ 10%.

3. LEAKAGE INDUCTANCE (@100KHZ, 1Vrms) :

PIN 1-4 (6-7-8-9-10 SHORT) = 100 uH MAX.

4. SELF RESONANT FREQ. :

PIN1-4 = 700 KHZ MIN.

5. TURN RATION (@100KHZ, 1Vrms) :

PIN 1-4:6-9 = 30 $\pm$ 1%.

PIN 1-4:7-9 = 30 $\pm$ 1%.

PIN 1-4:8-10 = 60 $\pm$ 1%.

6. HI-POT (@3000VAC, 1mA,2S) ; P-S

						TITLE		TRANSFORMER
						DWG. NO.		ATC-04-003
						UNITS:		M/M
						DATE		01/09/04
REVISIONS						SAFETY		
						SHEET 1 OF 1		1
						DRAW		Pair