
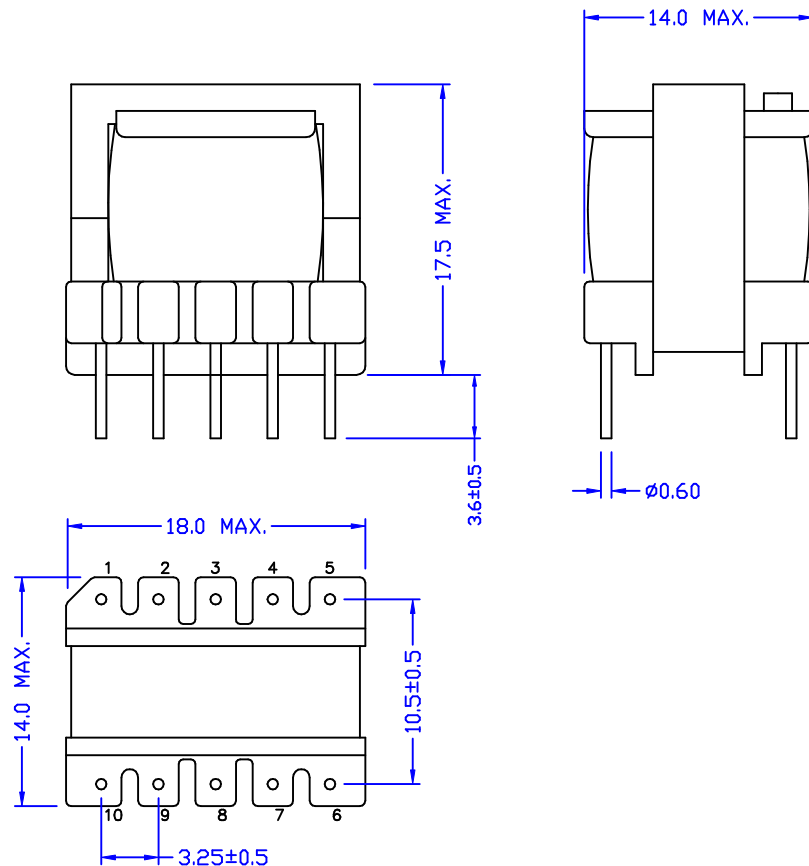
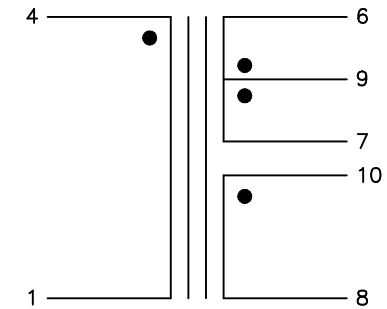





ELECTRICAL CHARACTERISTICS :

- DCR :
 - PIN 1-4 = 1.4 OHM $\pm$ 15%
 - PIN 6-9 = 20m OHM MAX.
 - PIN 7-9 = 20m OHM MAX.
 - PIN 8-10 = 25m OHM MAX.
- INDUCTANCE (@10KHZ, 1Vrms) :
 - PIN 1-4 = 1 mH $\pm$ 10%.
- LEAKAGE INDUCTANCE (@100KHZ, 1Vrms) :
 - PIN 1-4 (6-7-8-9-10 SHORT) = 100 uH MAX.
- SELF RESONANT FREQ. :
 - PIN1-4 = 700 KHZ MIN.
- TURN RATION (@100KHZ, 1Vrms) :
 - PIN 1-4:6-9 = 30 $\pm$ 1%.
 - PIN 1-4:7-9 = 30 $\pm$ 1%.
 - PIN 1-4:8-10 = 60 $\pm$ 1%.
- HI-POT (@3000VAC, 1mA,2S) ; P-S

						TITLE TRANSFORMER DWG. NO. ATC—04—003A	
	RELEASE	11/29/2004	PAIR	AL	SUEDY	UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	
REVISIONS						11/29/04	
							SHEET 10F 1
							DRAW <i>Pair</i>