
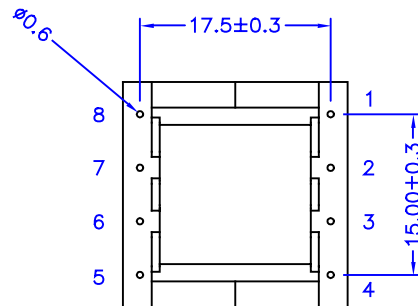

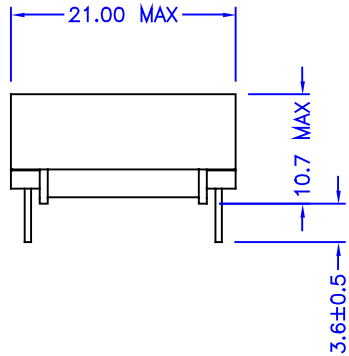




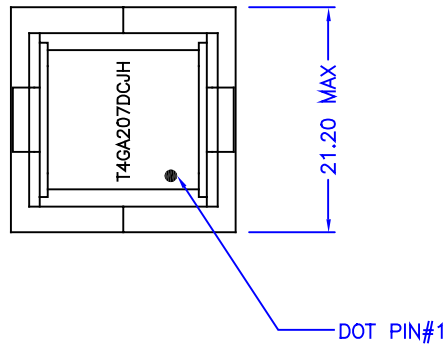

ELECTRICAL CHARACTERISTICS:

- DCR: PIN 3-7 = 3 OHM $\pm$ 12%.
PIN 4-8 = 0.49 OHM $\pm$ 12%.
PIN 5-1 = 0.42 OHM $\pm$ 12%.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 3-7 = 948 uH $\pm$ 20%.
PIN 4-8 = 153 uH $\pm$ 20%.
PIN 5-1 = 11.5 uH $\pm$ 20%.
- TURN RATIO
(@500KHZ, 1Vrms): PIN 3-7:4-8 = 2.48 $\pm$ 1%.
(@1.5KHZ, 1Vrms) : PIN 3-7:5-1 = 9.06 $\pm$ 5%.
- HI-POT (@500VDC, 1mA, 2S) :
PIN 1-7 , 4-7 , 1-4

D	SPEC. & DIM.	08/12/2004	BART	MICHAEL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE	TRANSFORMER
C	LABEL	06/31/2004	BART	AL	SUEDY		DWG. NO.	ATC-04-005
B	PIN#1	04/23/2004	PAIR	AL	SUEDY			
	RELEASE	02/03/2004	BART	YEN	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	02/03/04	DRAW Pair