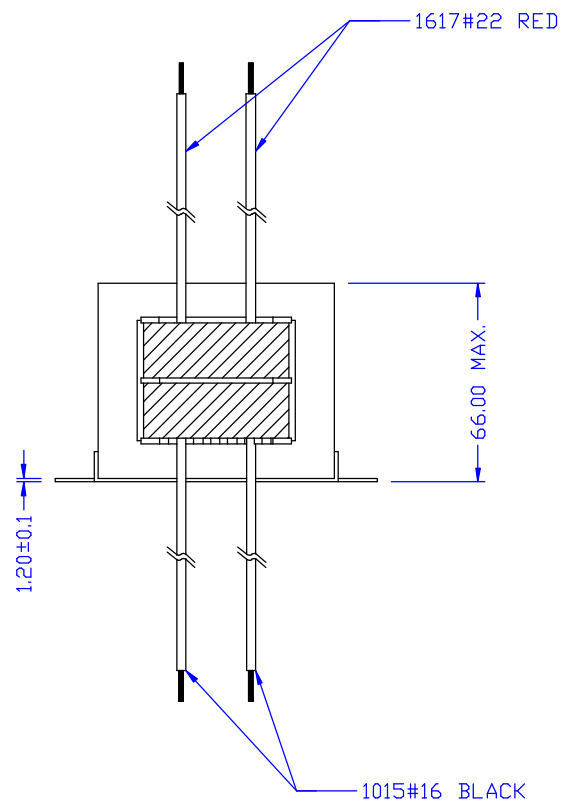
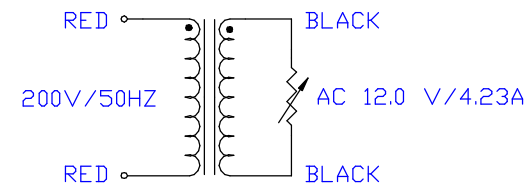
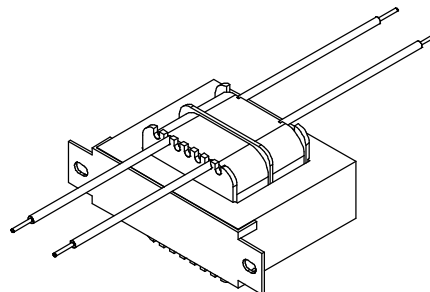
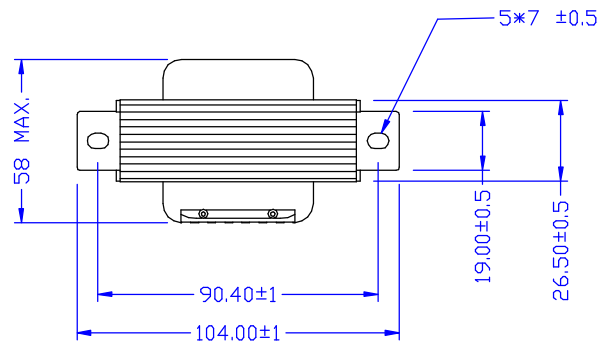


ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 220 V 50 HZ.
2. EXCITING CURRENT : INPUT PRIMARY 200 V 50 HZ 80 mA MAX.
3. SECONDARY RATED VOLTAGE :

INPUT VOLTAGE	COLOR/PIN NO	RATED VOLTAGE	RATED CURRENT	VOLTAGE REGULATION	NO LOAD VOLTAGE
220V/50HZ	BLACK-BLACK	12.0VAC±5%	4.23A		AC13.3V±5%
4. HI-POT TEST : SHALL WITHSTAND WITHOUT BREAKDOWN, INPUT 50 HZ
 LEAKAGE CURRENT 5 mA/1MIN.
 2.0 KV FOR ONE MINUTE BETWEEN PRIMARY TO SECONDARY.
 2.0 KV FOR ONE MINUTE BETWEEN PRIMARY TO CORE.
 1.0 KV FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
5. INSULATION TEST : 500 VDC 100 M OHM MIN. BETWEEN WINDINGS AND WINDINGS AND CORE.

						Atech®		TITLE POWER TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:0212794-6667 FAX:0212794-8004		ATC-04-021	
RELEASE		03/18/2004	BART	PAIR	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						03/18/04		DRAW Pair	