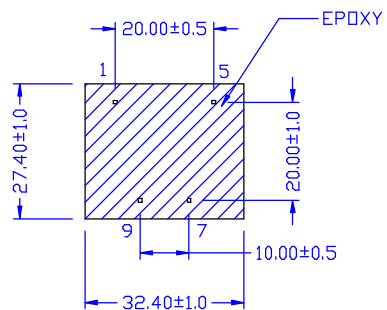
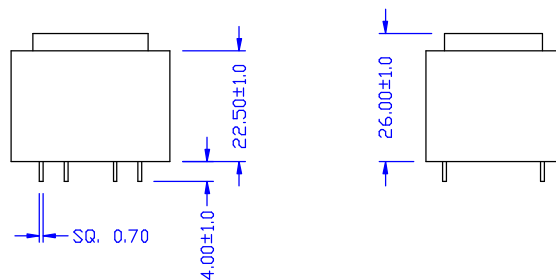
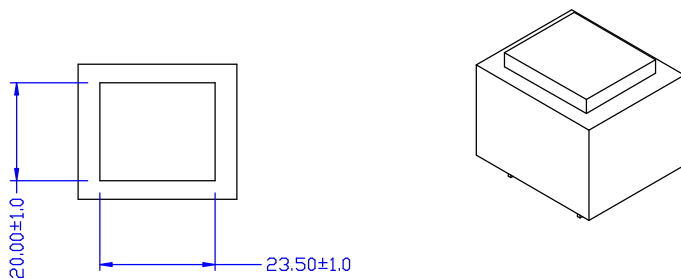


ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 230 V 50 HZ.
2. EXCITING CURRENT : INPUT PRIMARY 230 V 50 HZ 25 mA MAX.
3. SECONDARY RATED VOLTAGE :

INPUT VOLTAGE	COLOR/PIN NO.	RATED VOLTAGE	RATED CURRENT	VOLTAGE REGULATION	NO LOAD VOLTAGE
200V/50HZ	PIN 9-7	12.0VAC±5%	0.125A		AC15.0V±5%
4. HI-POT TEST : SHALL WITHSTAND WITHOUT BREAKDOWN, INPUT 50HZ LEAKAGE CURRENT 5 mA/1MIN.
3.0 KV FOR ONE MINUTE BETWEEN PRIMARY TO SECONDARY.
5. INSULATION TEST : 500 VDC 100 M OHM MIN. BETWEEN WINDINGS AND WINDINGS AND CORE.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE POWER TRANSFORMER	
							DWG. NO. ATC-04-022	
	RELEASE	03/18/2004	BART	PAIR	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						03/18/04		