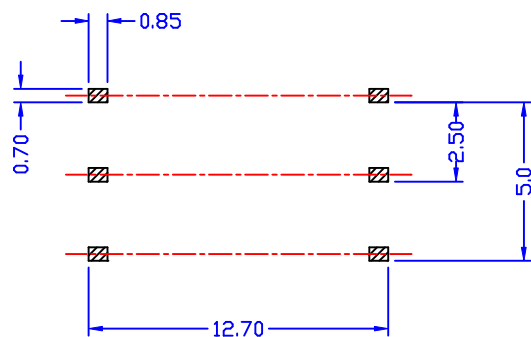
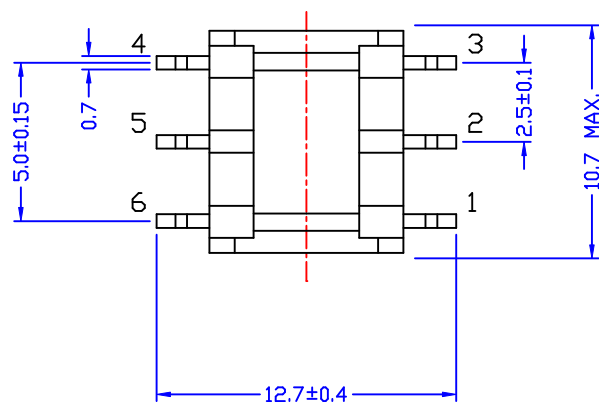
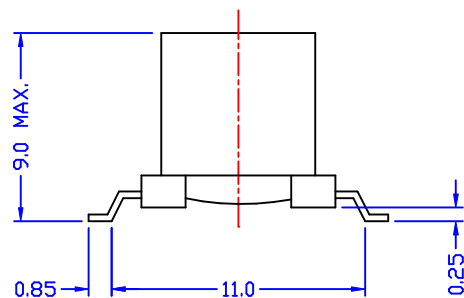
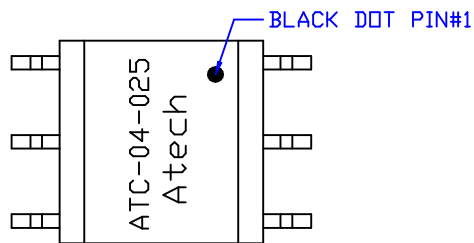


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 0.25 Ω M MAX.
PIN 4-5 = PIN 5-6 = 0.65 Ω M MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-3 = 580 μ H +/-30%
- LEAKAGE INDUCTANCE (@10KHZ, 50mVrms) :
PIN 1-3 (4-6 SHORT) = 0.35 μ H MAX.
- TURN RATIO (@150KHZ, 1Vrms) : PIN 6-5 : PIN 5-4 = 1+/- 1%
(@1.2MHZ, 1Vrms) : PIN 6-5 : 1-3 = 1.34+/-1%
- HI-POT (@500VDC, 1000M Ω M) : PIN 1-6

						Atech®		TITLE DC/DC CONVERTER
						Atech Technology Co., Ltd.		DWG. NO.
						TEL:022794-6667 FAX:022794-8004		ATC-04-025
RELEASE		04/26 /2004	PAIR	KEVIN	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	DRAW	Pair
						04/26/04		