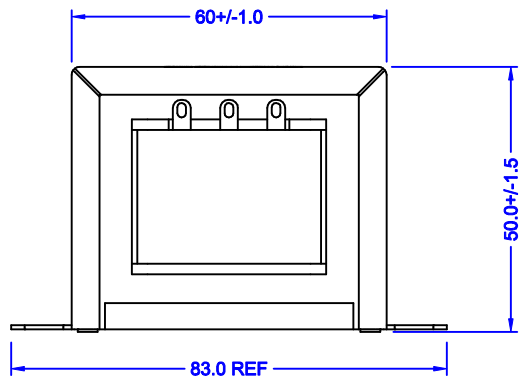
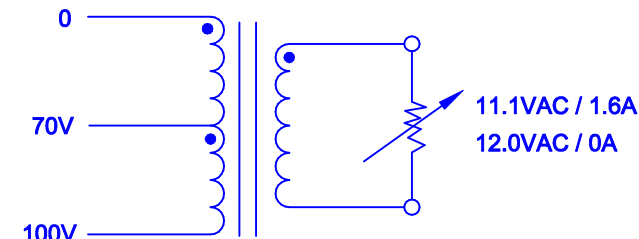
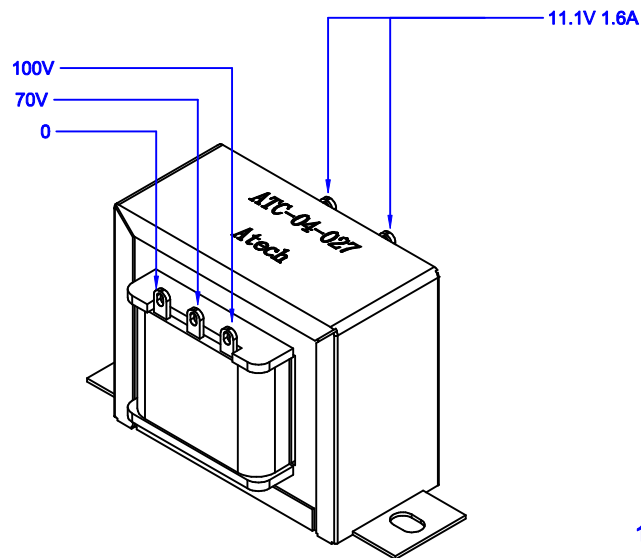
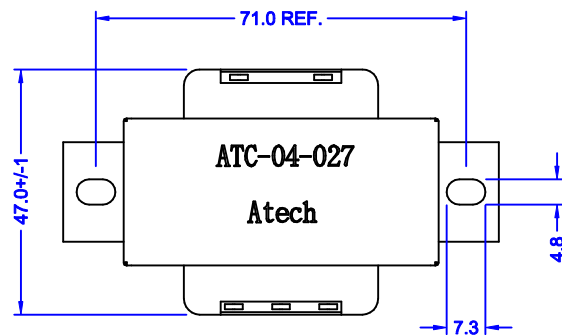


ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 70/100V 60Hz.
2. EXCITING CURRENT: INPUT PRIMARY 70/100V 60Hz 90/70mA MAX.
3. SECONDARY RATED VOLTAGE :

INPUT VOLTAGE	COLOR/PIN NO.	RATED VOLTAGE	RATED CURRENT	NOLOAD VOLTAGE
70V/60Hz	1-2	AC11.1V±5%	1.6 A	AC12.0V±5%
100V/60Hz	1-3	AC11.1V±5%	1.6 A	AC12.0V±5%

4. HI-POT TEST : SHALL WITHSTAND WITHOUT BREAKDOWN :
(INPUT 60Hz LEAKAGE CURRENT 5 mA/1MIN.)
1.0 KV FOR ONE MINUTE BETWEEN PRIMARY TO SECONDARY.
1.0 KV FOR ONE MINUTE BETWEEN PRIMARY TO CORE.
1.0 KV FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
5. INSULATION TEST : 500VDC 100M OHM MIN.
BETWEEN WINDINGS AND WINDINGS AND CORE.
6. RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL: (02)2794-8867 FAX: (02)2794-8004		TITLE POWER TRANSFORMER	
								DWG. NO. ATC-04-027R	
	RELEASE	11/09/2005	PAIR	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW Pair
REVISIONS						11/09/05			