
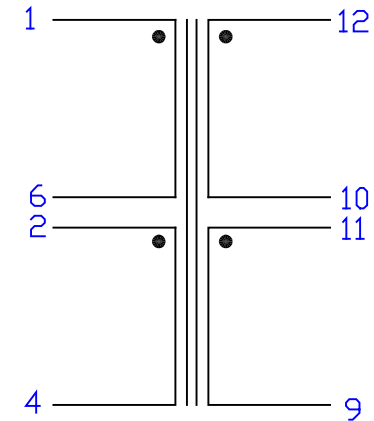

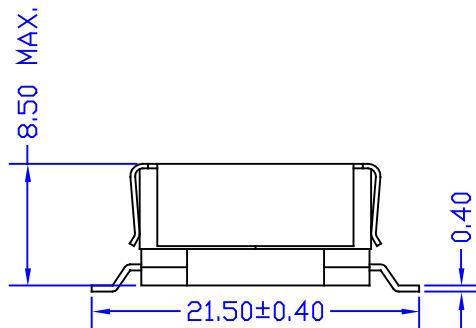


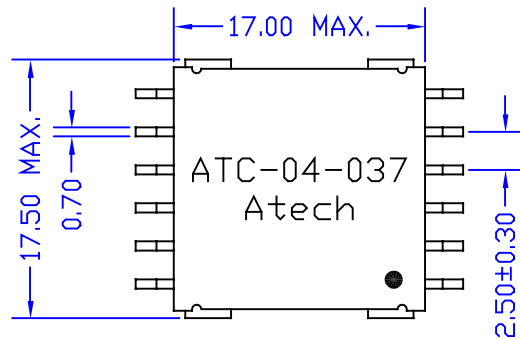

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-6 = 0.76 Ω HM MAX.
PIN 2-4 = 0.37 Ω HM MAX.
PIN 11-9 = 0.11 Ω HM MAX.
PIN 12-10 = 0.11 Ω HM MAX.
2. INDUCTANCE :
(@10KHZ, 0.1Vrms)
PIN 2-4 = 148 μ H $\pm$ 6%.
(@10KHZ, 0.1Vrms W/H 0.4A)
PIN 2-4 = 139 μ H MIN.
3. LEAKAGE INDUCTANCE (@50KHZ, 0.1Vrms) :
PIN 2-4 (1-6 SHORT) = 10 μ H MAX.
4. TURN RATIO :
(@150KHZ, 0.1Vrms)
PIN 1-6:2-4 = 1.5 $\pm$ 3%.
(@4KHZ, 0.1Vrms)
PIN 2-4:12-10 = 6 $\pm$ 1%.
PIN 2-4:11-9 = 6 $\pm$ 1%.
5. HI-POT (@500VAC, 1mA, 1S) :
PIN 2-12, 1-2

NONE TOLERANCE FOR REFERENCE

					Atech®		TITLE TRANSFORMER	
					Atech Technology Co., Ltd.		DWG. NO.	
					TEL:02-2794-6667 FAX:02-2794-8004		ATC-04-037	
RELEASE		07/09	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD			
REVISIONS						DATE	DRAW	Pair
						07/09/04		