
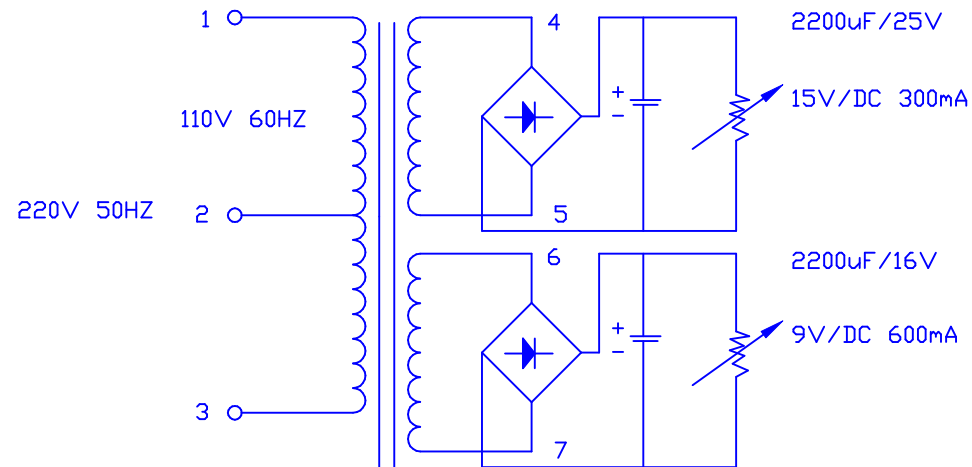


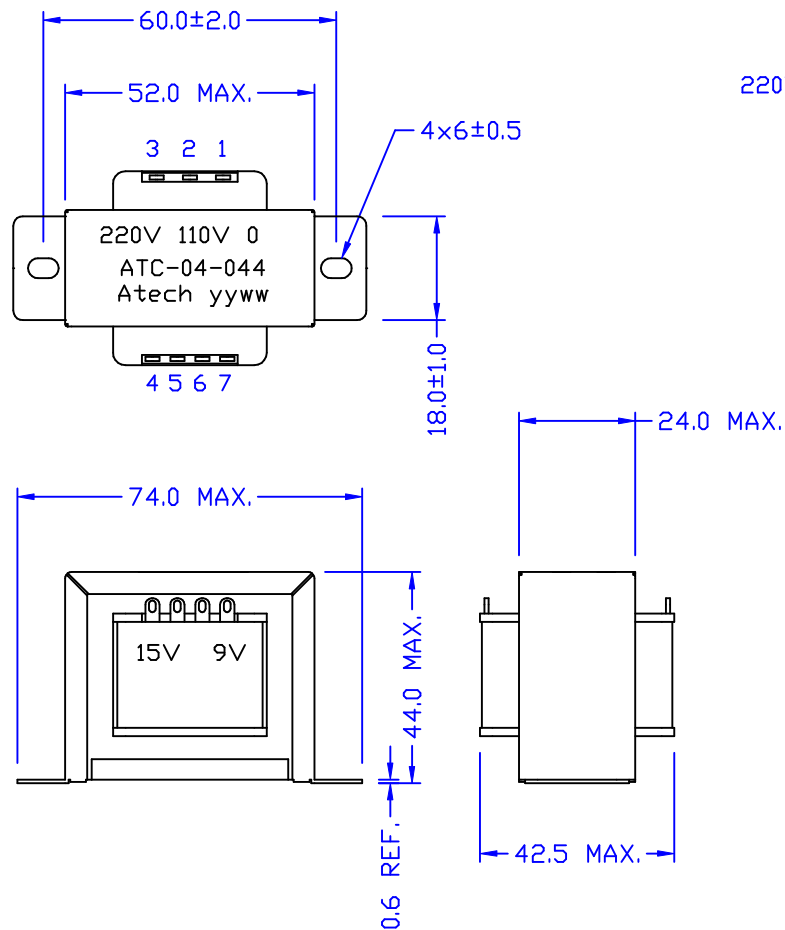

ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 110/220V 60/50Hz.
2. EXCITING CURRENT: INPUT PRIMARY 110/220V 60/50Hz 40 mA MAX.
3. SECONDARY RATED VOLTAGE :

INPUT VOLTAGE	COLOR/PIN NO.	RATED VOLTAGE	RATED CURRENT	NO LOAD VOLTAGE
110V/60Hz	4-5	DC15V±5%	0.3 A	AC16.5V±5%
220V/50Hz	4-5	DC15V±5%	0.3 A	AC16.5V±5%
110V/60Hz	6-7	DC9V±5%	0.6 A	AC10.8V±5%
220V/50Hz	6-7	DC9V±5%	06 A	AC10.8V±5%

4. HI-POT TEST : SHALL WITHSTAND WITHOUT BREAKDOWN ,INPUT 60 Hz LEAKAGE CURRENT 5 mA/1MIN.
1.0 KV FOR ONE MINUTE BETWEEN PRIMARY TO SECONDARY.
1.0 KV FOR ONE MINUTE BETWEEN PRIMARY TO CORE.
1.0 KV FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
5. INSULATION TEST : 500VDC 100M OHM MIN.
BETWEEN WINDINGS AND WINDINGS AND CORE.

						Atech®		TITLE POWER TRANSFORMER	
B	DIM. & SPEC.	12/02/2004	BART	AL	SUEDY	Atech Technology Co., Ltd.		DWG. NO. ATC-04-044	
A	DIM. & SPEC.	10/11/2004	BART	AL	SUEDY	TEL:022794-6667 FAX:022794-8004			
	RELEASE	07/26/2004	BART	AL	SUEDY	UNITS: M/M		SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 10F 1	
REVISIONS						07/26/04		DRAW Pair	