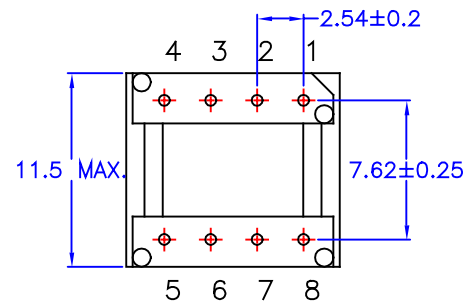
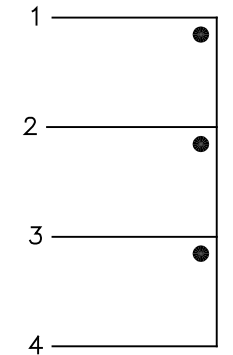

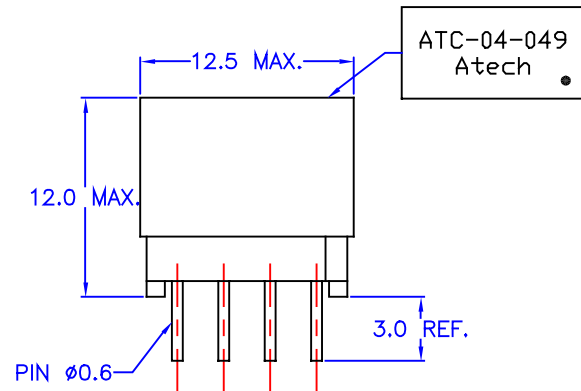


GRID
2.54 X 2.54

Ø1.2

NONE TOLERANCE FOR REFERENCE

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-4 = 2.5 OHM $\pm 10\%$,
PIN 2-3 = 2.5 OHM $\pm 10\%$,
PIN 1-2 = 1.6 OHM $\pm 10\%$.
- INDUCTANCE (@10KHZ, 0.3Vrms) :
PIN 1-4 = 383.4 mH MIN.
- TURN RATIO (@100KHZ, 0.2Vrms) :
PIN 4-3:3-2 = 1 $\pm 1\%$,
PIN 3-2:2-1 = 1.21 $\pm 1\%$.
- HI-POT (@1000VAC, 1mA, 2S) :
WINDING TO CORE.

						Atech[®] Atech Technology Co., Ltd. TEL:(02)2794-6867 FAX:(02)2794-8004	TITLE EP-10 TRANSFORMER		
B	SPEC.&DIM.	07/30/2004	BART	AL	SUEDY		DWG. NO. ATC-04-049		
A	SPEC.&DIM.	07/26/2004	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
RELEASE		07/23/2004	BART	AL	SUEDY				
ND	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW		Pair
REVISIONS						07/23/04			