
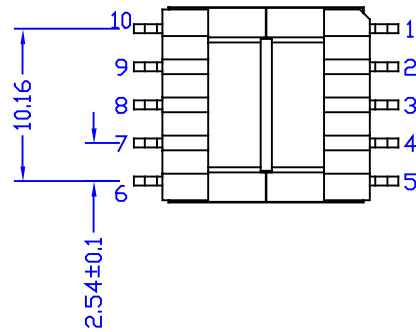

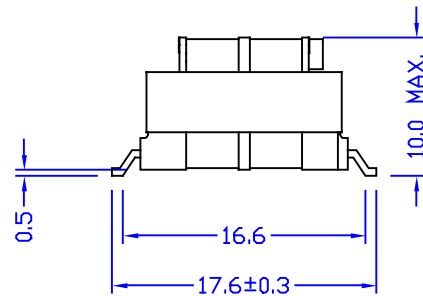
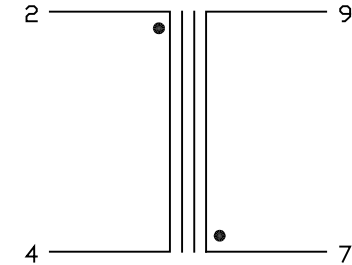



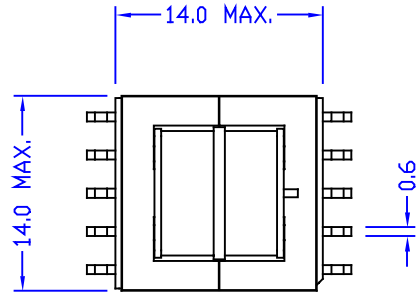

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 2-4 = 36.6 OHM MAX.
PIN 7-9 = 36.6 OHM MAX.
2. INDUCTANCE (@40KHZ, 1Vrms) :
PIN 2-4 = 200 mH $\pm$ 30%.
PIN 7-9 = 200 mH $\pm$ 30%.
3. Q (@1KHZ, 1Vrms) :
PIN 2-4 = 12 REF.
4. TURN RATIO (@20KHZ, 100mVrms) :
PIN 2-4:7-9 = 1 $\pm$ 1%.
5. HI-POT (@1KVAC, 1mA, 2S) :
PRI-SEC, PRI-CORE.

NONE TOLERANCE FOR REFERENCE

					Atech® Atech Technology Co., Ltd. TEL:028794-6667 FAX:028794-8004	TITLE CHOKE		
B	W/O MARKING	08/02/2004	BART	AL		SUEDY	DWG. NO.	ATC-04-051
A	SPEC. & DIM.	07/29/2004	BART	MICHAEL		SUEDY		
	RELEASE	07/26/2004	BART	MICHAEL		SUEDY	UNITS:	SAFETY
ND	DESCRIPTION	DATE	BY	CHK		APPD	M/M	
REVISIONS						DATE	DRAW	Pair
						07/26/04		