
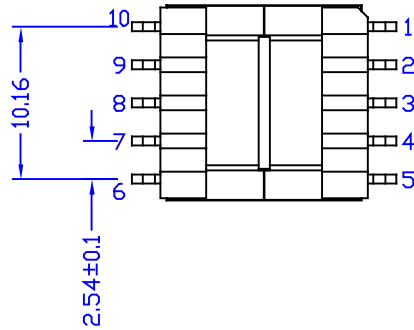

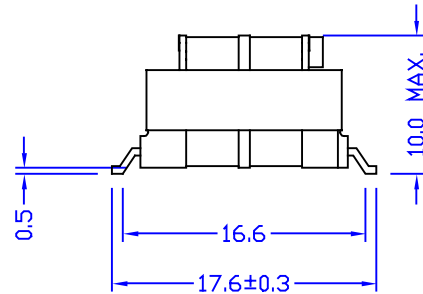
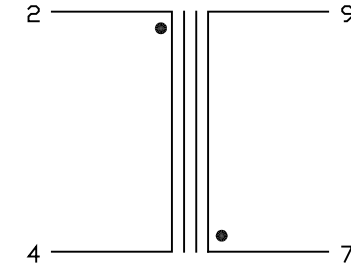



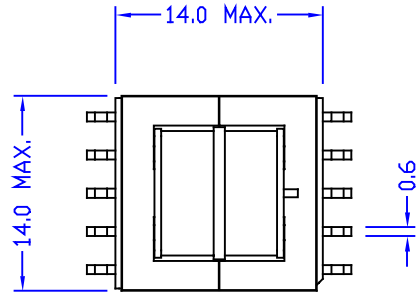

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 2-4 = 64.2 OHM MAX.
PIN 7-9 = 64.2 OHM MAX.
2. INDUCTANCE (@30KHZ, 1Vrms) :
PIN 2-4 = 400 mH $\pm$ 30%.
PIN 7-9 = 400 mH $\pm$ 30%.
3. Q (@1KHZ, 1Vrms) :
PIN 2-4 = 15 REF.
4. TURN RATIO (@20KHZ, 100mVrms) :
PIN 2-4:7-9 = 1 $\pm$ 1%.
5. HI-POT (@1KVAC, 1mA, 2S) :
PRI-SEC, PRI-CORE.

NONE TOLERANCE FOR REFERENCE

						Atech®		TITLE
						Atech Technology Co., Ltd.		CHOK
						TEL:022794-6667 FAX:022794-8004		DWG. NO.
A	W/O MARKING	08/02/2004	BART	AL	SUEDY	UNITS:	SAFETY	ATC-04-053
	RELEASE	07/29/2004	BART	MICHAEL	SUEDY	M/M		SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						07/29/04		Pair